

## DOOR SPECIFICATION

Steel doorsets **DFM DS** feature innovative design and robust construction. Door leaf is constructed of 2 steel skins 0.75mm with thick rebate on edges and rockwool infill 140 kg/m<sup>3</sup> and tecbor board inside. Door frame is made of steel zinc coated sheet 1,5mm, corner type design.

## DOOR SIZES

Size of doors **DFM DS 120-2** within frames:

- width: 1077 mm ÷ 2154 mm
- height: 1730 mm ÷ 2307 mm

## TECHNICAL PARAMETERS:

Fire resistance class: EL<sub>2</sub>120  
Mechanical resistance: class 3 acc.to EN 1192  
Mechanical durability: class C5 acc. to EN 12600; EN16034

## STANDARD EQUIPMENT


Standard equipment:

- Mortise latch and bolt lock,
- Set of stainless steel U-form handles on long shields,
- DIN eurocylinder and 3 standard keys,
- 2 pcs of stainless steel 3D hinges,
- 2 pcs of safety pins,
- Fire resistant intumescent gasket and rubber gasket,
- Powder coating to RAL,
- Alternative equipment and other door features on request.

## CERTIFICATE

Certificate of constancy of performance 23-10-CPR-W1116  
EFFECTIS NL 2018-Efectis-R000544

## DRAWINGS

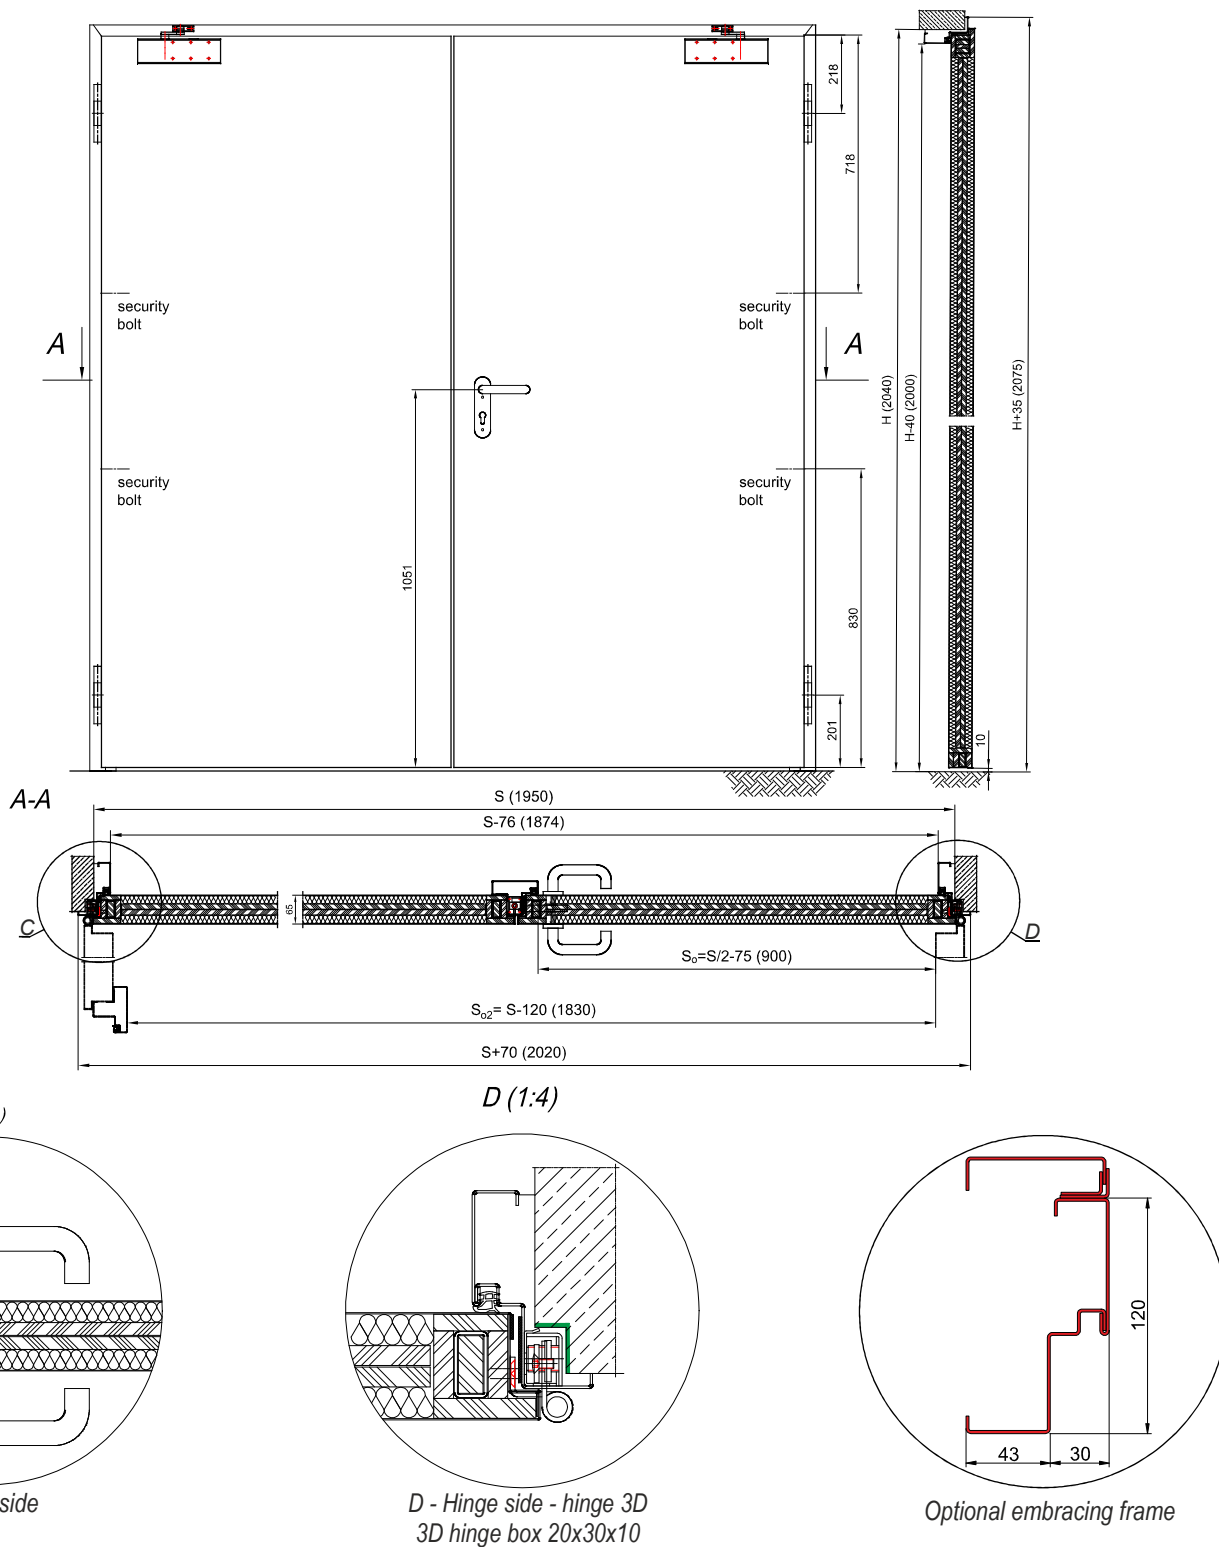

## DOOR SPECIFICATION

Steel doorsets **DFM DS** feature innovative design and robust construction. Door leaf is constructed of 2 steel skins 0.75mm with thick rebate on edges and rockwool infill 140 kg/m<sup>3</sup>. Door frame is made of steel zinc coated sheet 1,5mm, corner type design.

## DOOR SIZES

Size of doors **DFM DS 120-2** within frames:

- width: 1077 mm ÷ 2154 mm
- height: 1730 mm ÷ 2307 mm

## TECHNICAL PARAMETERS:

Fire resistance class: EL<sub>2</sub>120  
Mechanical resistance: class 3 acc. to EN 1192  
Mechanical durability: class C5 acc. to EN 12600; EN16034

## STANDARD EQUIPMENT


Standard equipment:

- Mortise latch and bolt lock,
- Set of stainless steel U-form handles on long shields,
- DIN eurocylinder and 3 standard keys,
- 2 pcs of stainless steel hinges,
- 2 pcs of safety pins,
- Fire resistant intumescent gasket and rubber gasket,
- Powder coating to RAL,
- Alternative equipment and other door features on request.

## CERTIFICATE

Certificate of constancy of performance 23-10-CPR-W1116  
EFFECTIS NL 2018-Efectis-R000544

## DRAWINGS

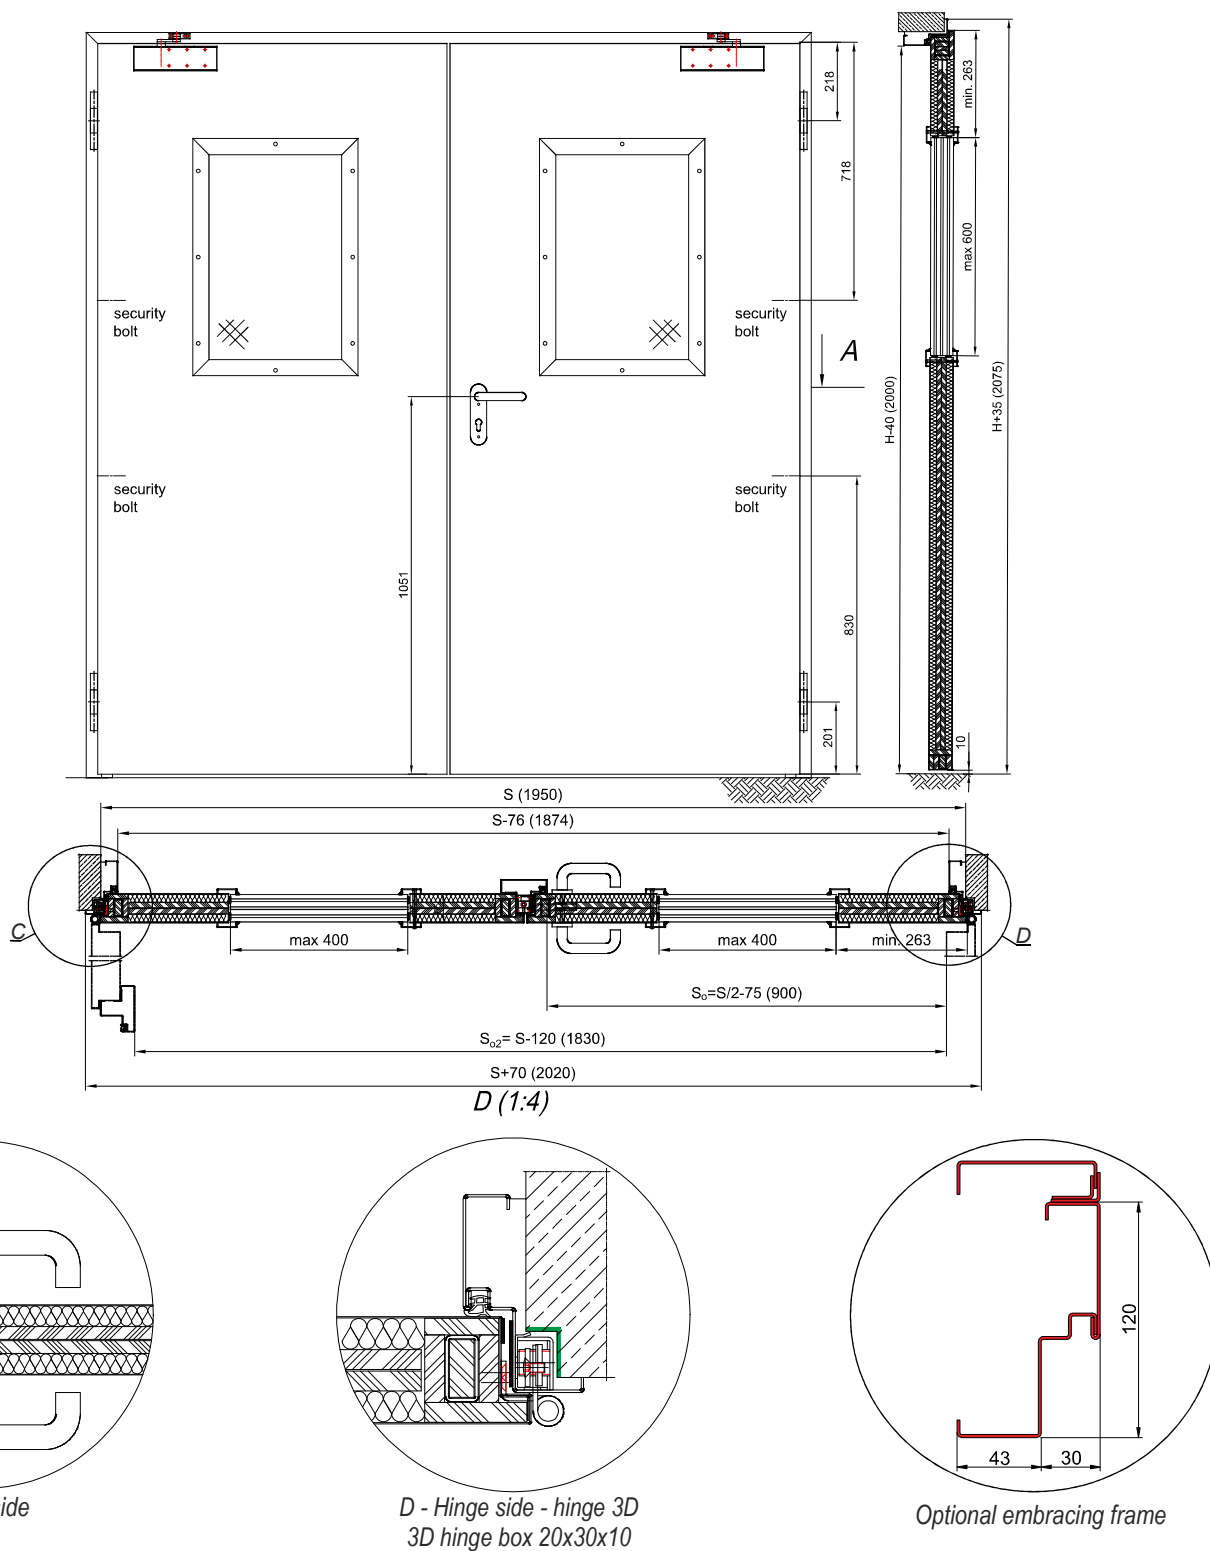

## DOOR SPECIFICATION

Steel doorsets **DFM DS** feature innovative design and robust construction. Door leaf is constructed of 2 steel skins 0.75mm with thick rebate on edges and rockwool infill 140 kg/m<sup>3</sup>. Door frame is made of steel zinc coated sheet 1,5mm, rectangular type design.

## DOOR SIZES

Size of doors **DFM DS 120-2** within frames:

- width: 1077 mm ÷ 2154 mm
- height: 1730 mm ÷ 2307 mm

## TECHNICAL PARAMETERS:

Fire resistance class: EI<sub>2</sub>120  
Mechanical resistance: class 3 wg EN 1192  
Mechanical durability: class C5 wg EN 12400; EN16034

## STANDARD EQUIPMENT


Standard equipment:

- Mortise latch and bolt lock,
- Set of stainless steel U-form handles on long shields,
- DIN eurocylinder and 3 standard keys,
- 2 pcs of stainless steel hinges,
- 2 pcs of safety pins,
- Fire resistant intumescent gasket and rubber gasket,
- Powder coating to RAL,
- Alternative equipment and other door features on request.

## CERTIFICATE

Certificate of constancy of performance 23-10-CPR-W1116  
EFFECTIS NL 2018-Efectis-R000544

## DRAWINGS

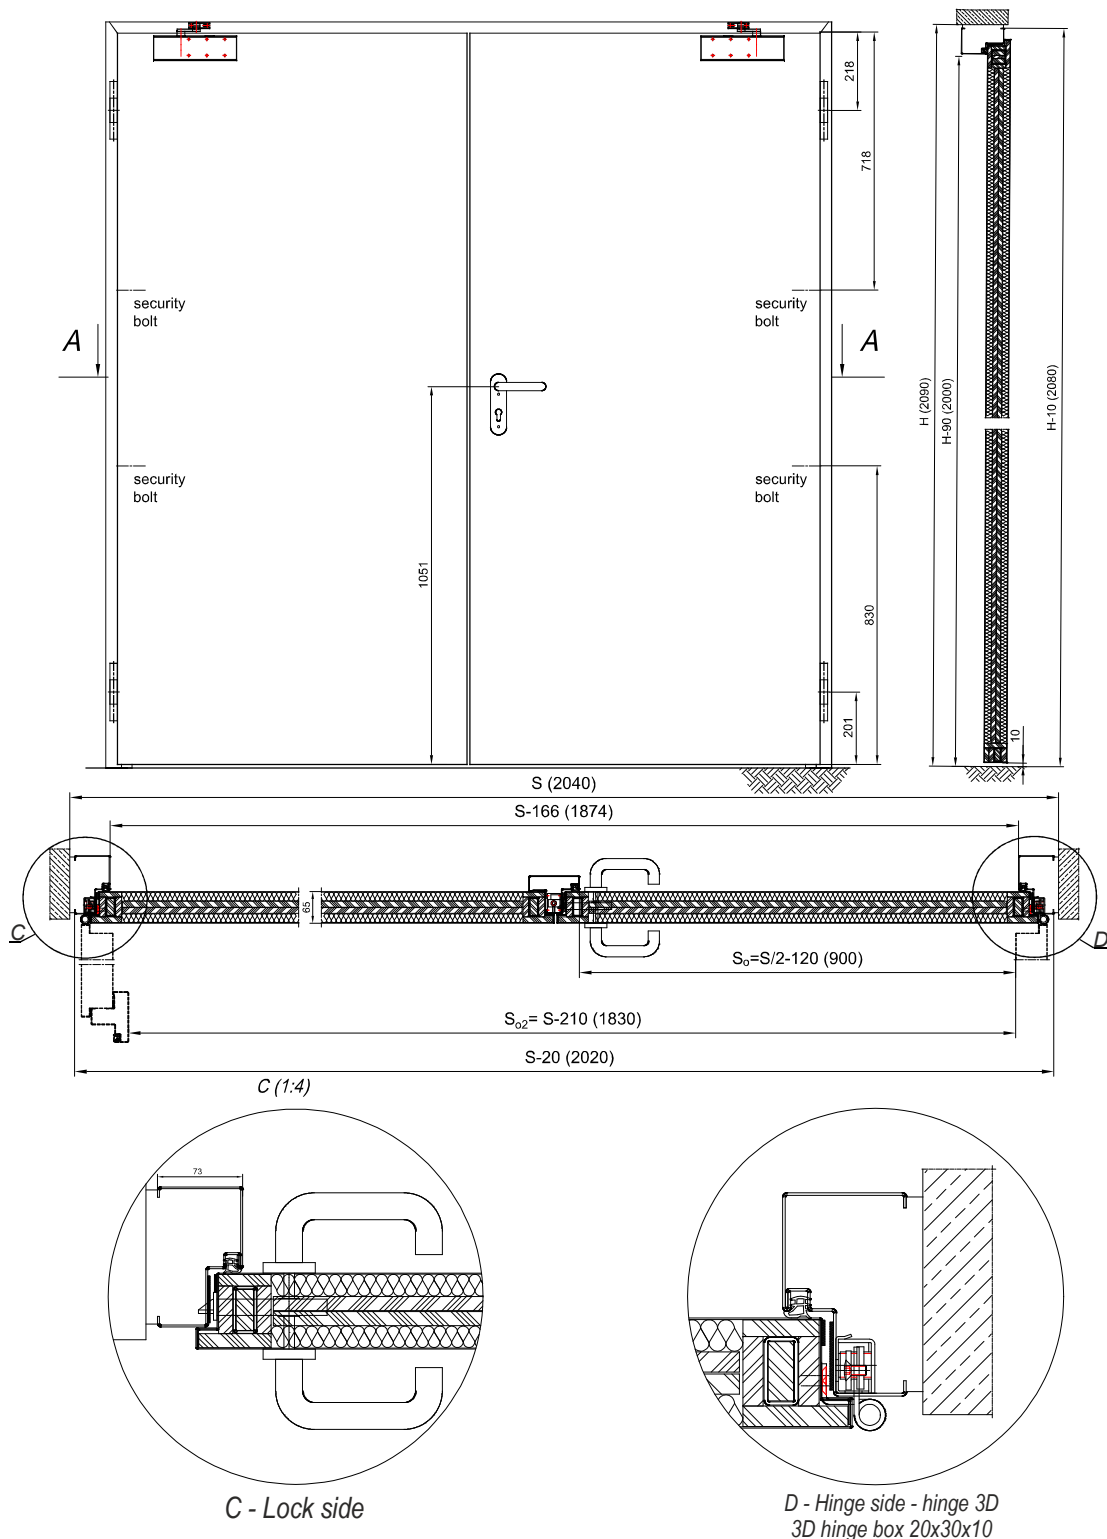

## DOOR SPECIFICATION

Steel doorsets **DFM** DS feature innovative design and robust construction. Door leaf is constructed of 2 steel skins 0.75mm with thick rebate on edges and rockwool infill 140 kg/m<sup>3</sup>. Door frame is made of steel zinc coated sheet 1,5mm, rectangular type design.

## DOOR SIZES

Size of doors **DFM** DS 120-2 within frames:

- width: 1077 mm ÷ 2154 mm
- height: 1730 mm ÷ 2307 mm

### TECHNICAL PARAMETERS:

Fire resistance class:	EI <sub>120</sub>
Mechanical resistance	class 3 wg EN 1192
Mechanical durability:	class C5 wg EN 12400: EN16034

## STANDARD EQUIPMENT

Standard equipment:

- Mortise latch and bolt lock,
- Set of stainless steel U-form handles on long shields,
- DIN eurocylinder and 3 standard keys,
- 2 pcs of stainless steel hinges,
- 2 pcs of safety pins,
- Fire resistant intumescent gasket and rubber gasket,
- Powder coating to RAL,
- Alternative equipment and other door features on request.

## CERTIFICATE

Certificate of constancy of performance 23-10-CPR-W1116  
EFFECTIS NL2018-Efectis-R000544

## DRAWINGS

