

**DOOR SPECIFICATION**

- custom manufacturing
- leaf with thick rebate 18 x 18 mm
- steel zinc frame
- leaf thickness 65 mm
- leaf construction of 2 steel skins 0.75 mm
- rockwool infill 140 kg/m<sup>3</sup> with plasterboard, leaf weight = 47 kg/m<sup>2</sup>
- powder coating, RAL palette

**DOOR SIZES**

	according to certificate AC158-UWB-W1485	according to CE- CSWU-2310-CPR-W1116
	internal door	external door
S width	593 mm ÷ 1110 mm	563 mm ÷ 1120 mm
H height	1768 mm ÷ 2345 mm	1760 mm ÷ 2345 mm

**CERTIFICATES**

National Certificate of Constasy of Performance, Certbud  
 Process Verbal, Efectis France  
 Classification report, Efectis Netherland  
 Certificate of Constasy of Performance, Certbud; CE marking- external doors

**STANDARD EQUIPMENT**

- 2 pcs of stainless steel 3D hinges
- 2 pcs of safety pins (in case of 3 hinges - 1 pc of safety pin)
- DIN eurocylinder and 3 standard keys
- set of stainless steel U-form handles on long shields
- perimeter rubber gasket, fire resistant intumescent gasket in door leaf and frame
- reinforcement for door closer
- alternative equipment and other door features on request


**OPTIONAL DOOR CONSTRUCTION**

- glazed with round (internal door) or rectangular glazing, single or double glass

**TECHNICAL PARAMETERS**

Mechanical resistance class 3 according to standard EN1192  
 optional class 4 according to standard EN1192  
 Mechanical durability class 5 according to standard EN16034  
 Thermal insulation 1,6 Ud [W/m<sup>2</sup>K] full door  
 Acoustic insulation Rw (C,Ctr) = 42 (-1;-4) dB full door, glazed door untested  
 Corrosion class C3 (optional C5)

**DRAWINGS**

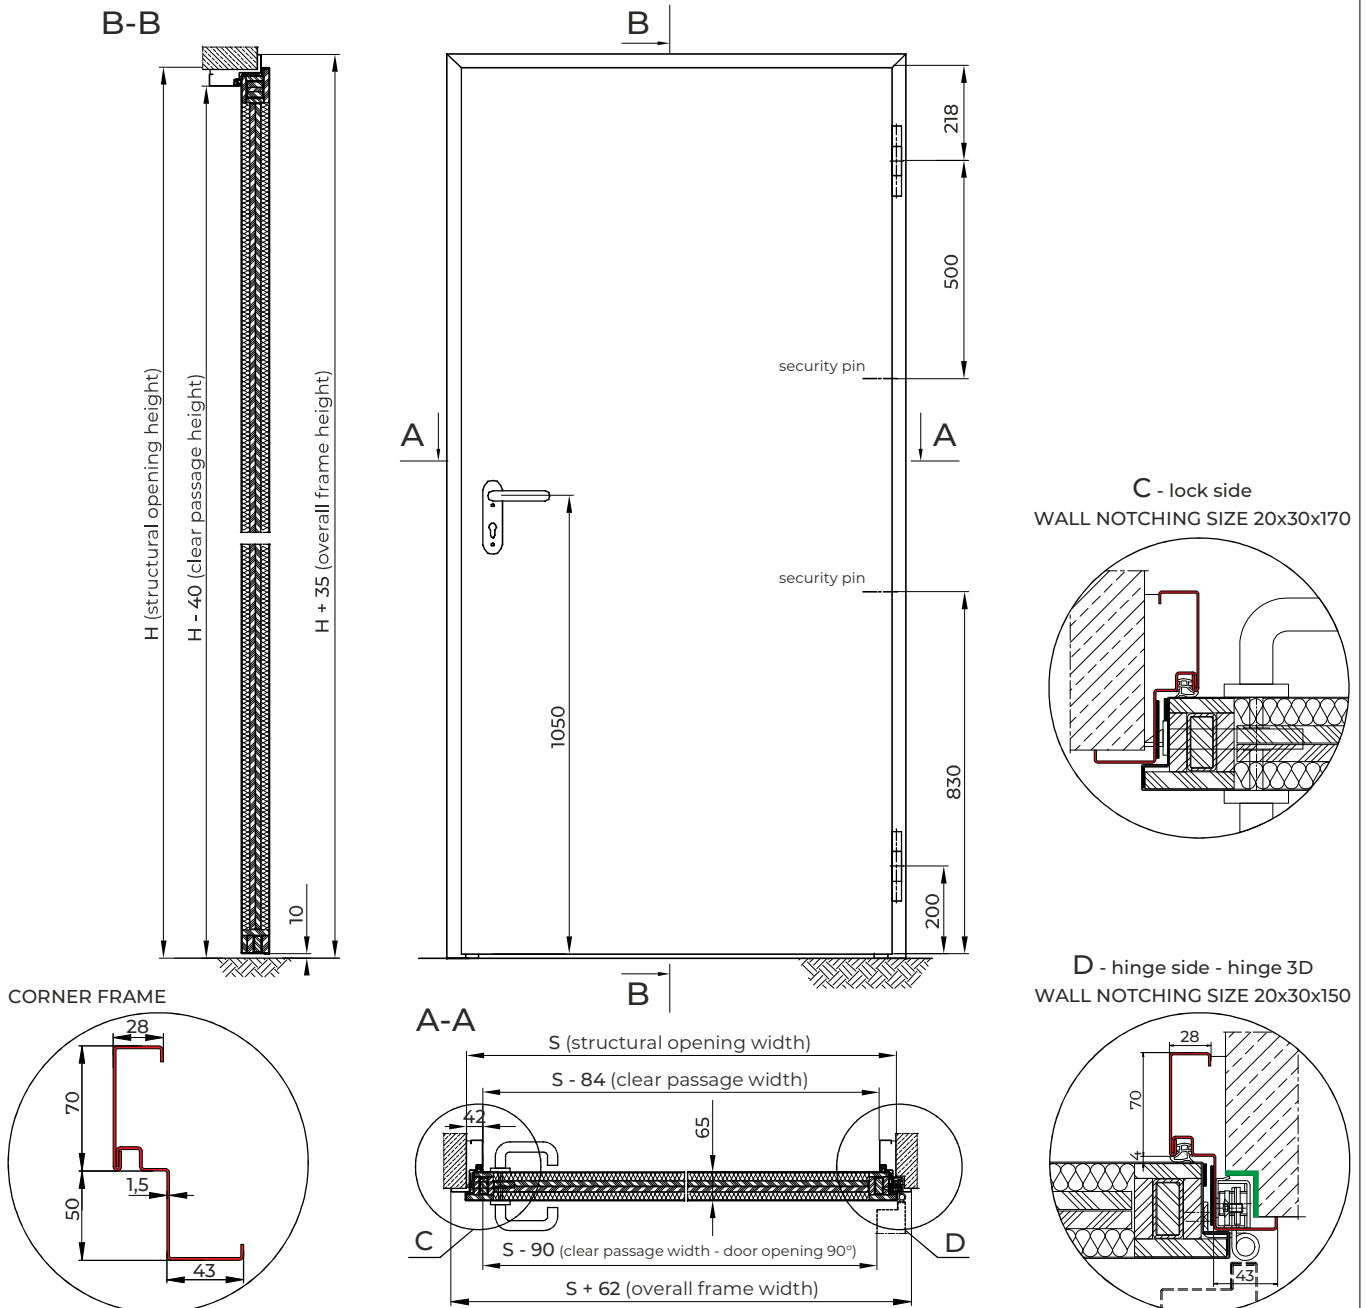

**DOOR SPECIFICATION**

- custom manufacturing
- leaf with thick rebate 18 x 18 mm
- steel zinc frame
- leaf thickness 65 mm
- leaf construction of 2 steel skins 0.75 mm
- rockwool infill 140 kg/m<sup>3</sup> with plasterboard, leaf weight = 47 kg/m<sup>2</sup>
- powder coating, RAL palette

**DOOR SIZES**

	according to certificate AC158-UWB-W1485	according to CE- CSWU-2310-CPR-W1116
	internal door	external door
S width	1153 mm ÷ 2230 mm	1114 mm ÷ 2344 mm
H height	1768 mm ÷ 2345 mm	1760 mm ÷ 2345 mm

**CERTIFICATES**

National Certificate of Constasy of Performance, Certbud  
 Process Verbal, Efectis France  
 Classification report, Efectis Nederland  
 Certificate of Constasy of Performance, Certbud; CE marking- external doors

**STANDARD EQUIPMENT**

- 2 pcs of stainless steel 3D hinges
- 2 pcs of safety pins (in case of 3 hinges - 1 pc of safety pin)
- DIN eurocylinder and 3 standard keys
- set of stainless steel U-form handles on long shields
- perimeter rubber gasket, fire resistant intumescent gasket in door leaf and frame
- reinforcement for door closer
- flush bolt in astragal of passive leaf
- alternative equipment and other door features on request


**OPTIONAL DOOR CONSTRUCTION**

- glazed with round (internal door) or rectangular glazing, single or double glass

**TECHNICAL PARAMETERS**

Mechanical resistance	class 3 according to standard EN1192 optional class 4 according to standard EN1192
Mechanical durability	class 5 according to standard EN16034
Thermal insulation	1,6 Ud [W/m <sup>2</sup> K] full door
Acoustic insulation	Rw (C,Ctr) = 42 (-1;-4) dB full door; glazed door untested
Corrosion class	C3 (optional C5)

**DRAWINGS**

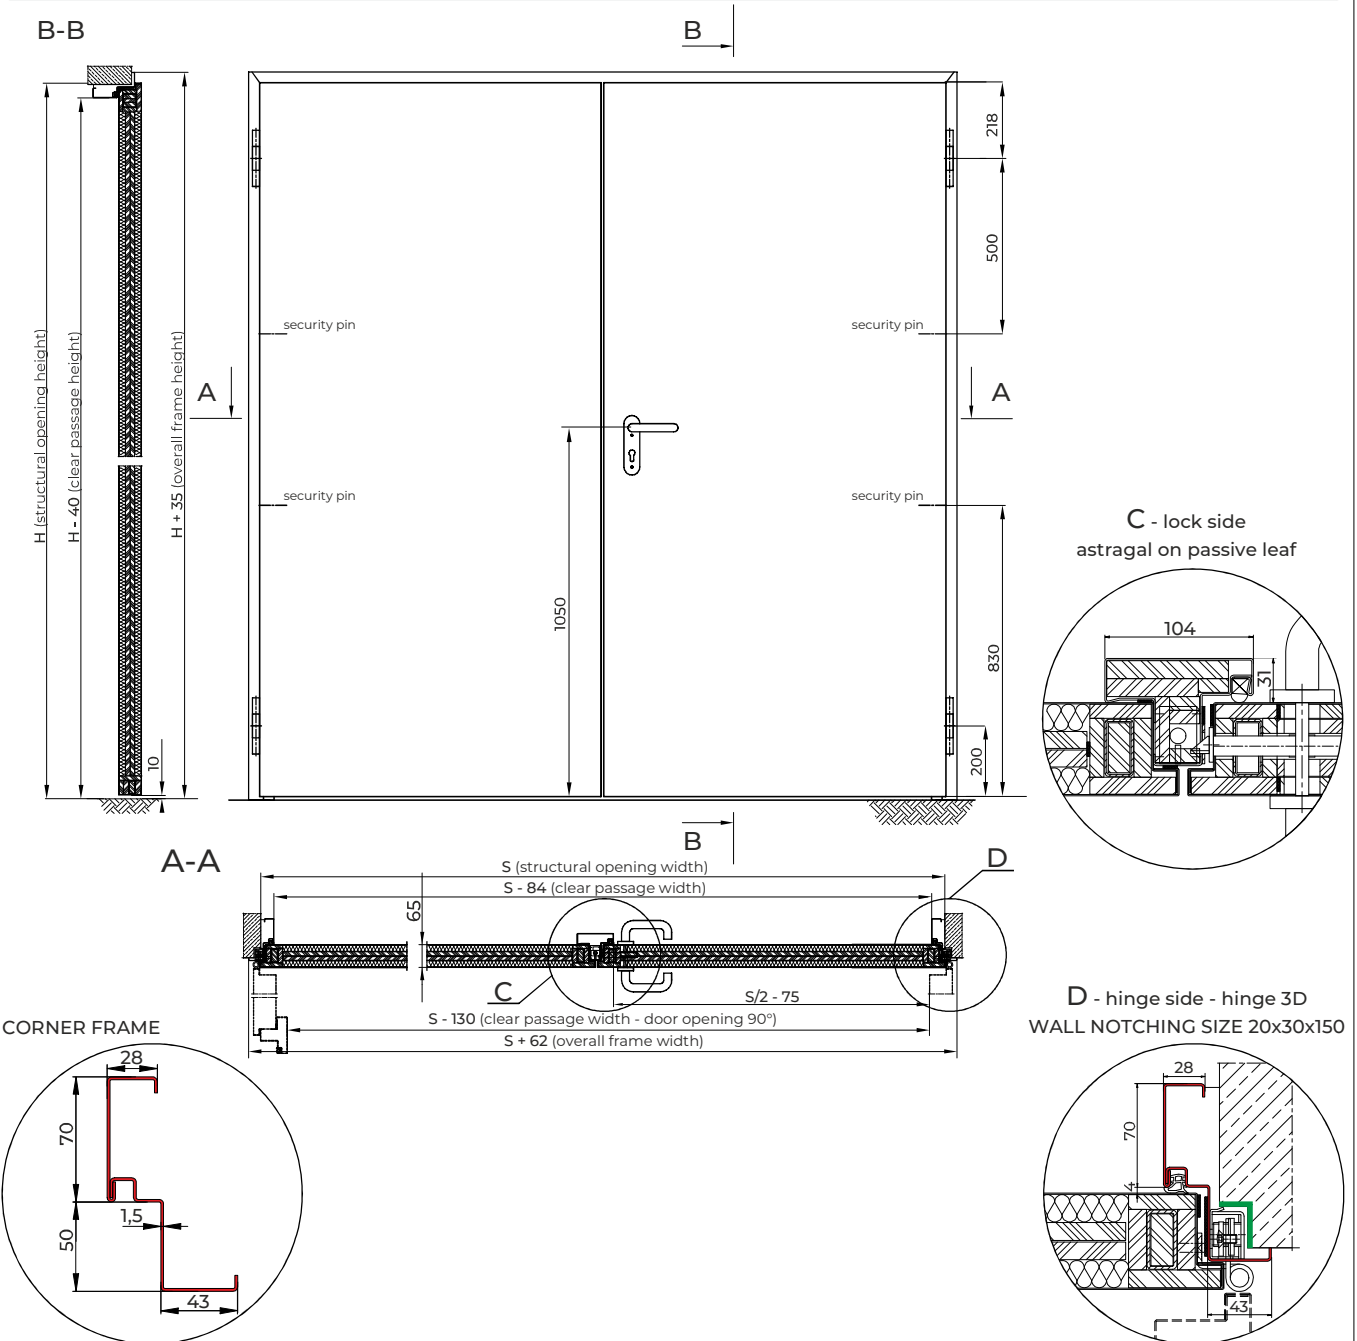

**DOOR SPECIFICATION**

- custom manufacturing
- leaf with thick rebate 18 x 18 mm
- steel zinc frame
- leaf thickness 65 mm
- leaf construction of 2 steel skins 0.75 mm
- rockwool infill 140 kg/m<sup>3</sup> with plasterboard, leaf weight = 47 kg/m<sup>2</sup>
- powder coating, RAL palette

**DOOR SIZES**

	according to certificate AC158-UWB-W1485	according to CE- CSWU-2310-CPR-W1116
	internal door	external door
S width	593 mm ÷ 1110 mm	563 mm ÷ 1120 mm
H height	1768 mm ÷ 2345 mm	1760 mm ÷ 2345 mm

**CERTIFICATES**

National Certificate of Constasy of Performance, Certbud  
 Process Verbal, Efectis France  
 Classification report, Efectis Netherland  
 Certificate of Constasy of Performance, Certbud; CE marking- external doors

**STANDARD EQUIPMENT**

- 2 pcs of stainless steel 3D hinges
- 2 pcs of safety pins (in case of 3 hinges - 1 pc of safety pin)
- DIN eurocylinder and 3 standard keys
- set of stainless steel U-form handles on long shields
- perimeter rubber gasket, fire resistant intumescent gasket in door leaf and frame
- reinforcement for door closer
- alternative equipment and other door features on request


**OPTIONAL DOOR CONSTRUCTION**

- glazed with round (internal door) or rectangular glazing, single or double glass

**TECHNICAL PARAMETERS**

Mechanical resistance	class 3 according to standard EN192 optional class 4 according to standard EN192
Mechanical durability	class 5 according to standard EN16034
Thermal insulation	not defined
Acoustic insulation	Rw (C,Ctr) = 42 (-1;-4) dB full door, glazed door untested
Corrosion class	C3 (optional C5)

**DRAWINGS**

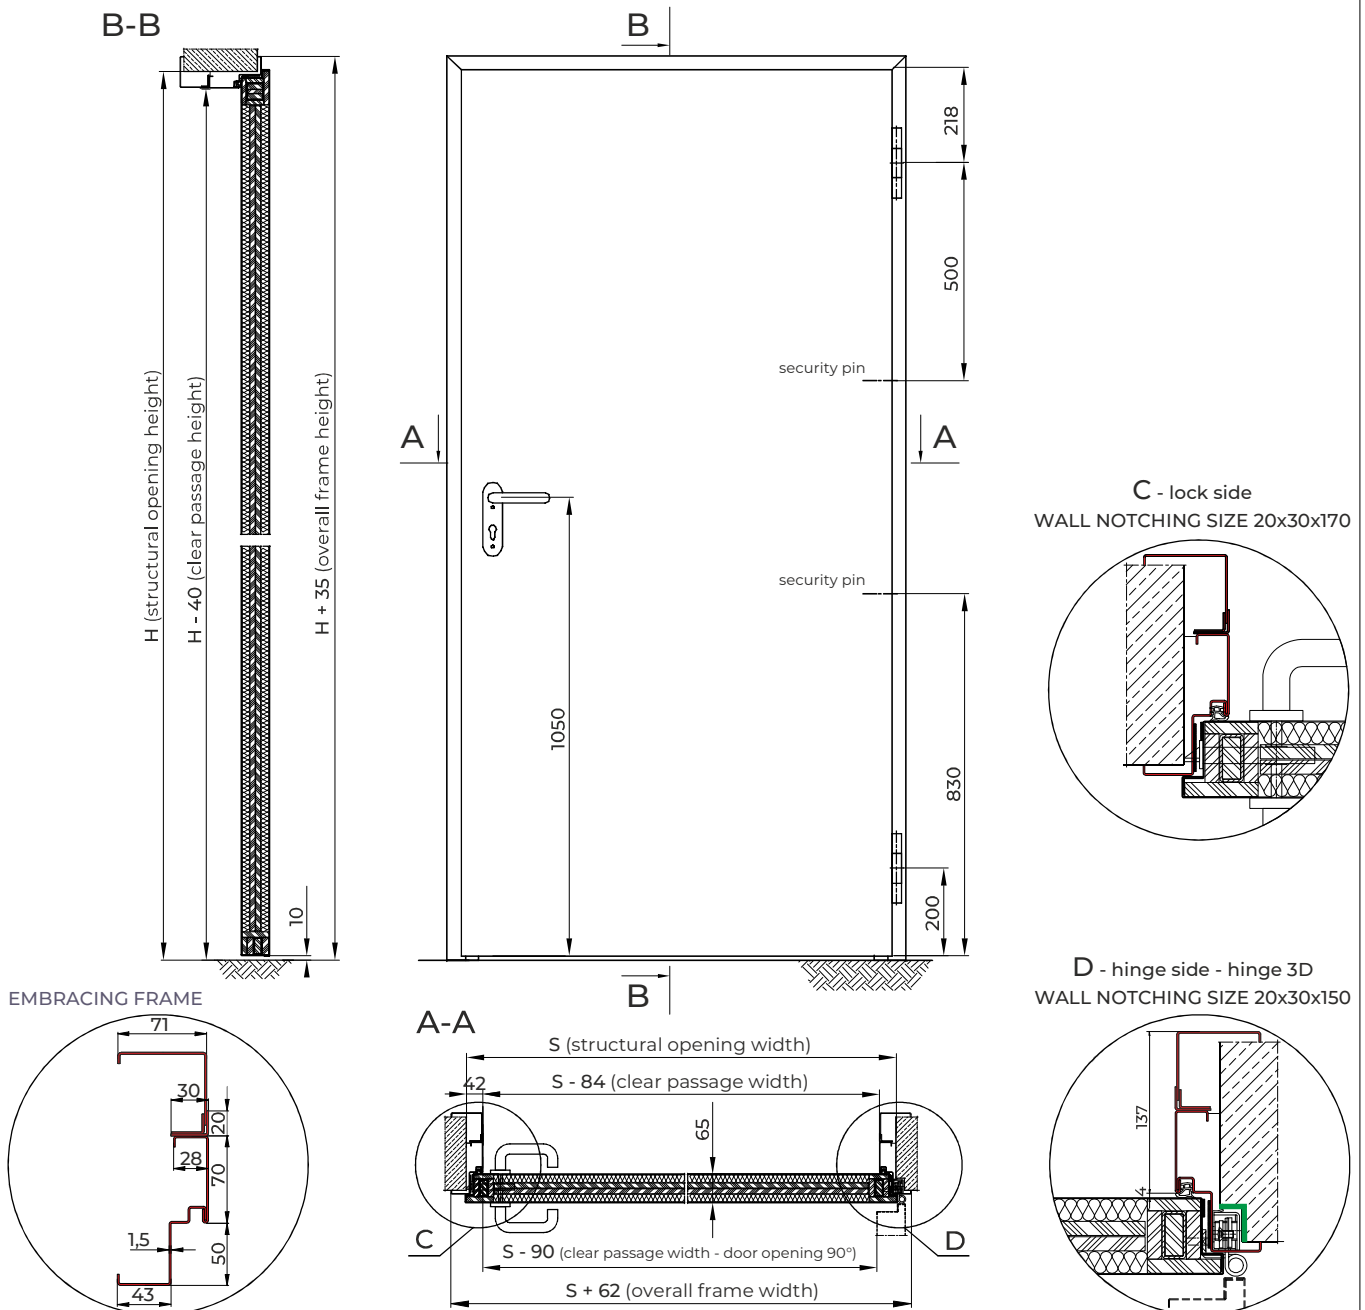

**DOOR SPECIFICATION**

- custom manufacturing
- leaf with thick rebate 18 x 18 mm
- steel zinc frame
- leaf thickness 65 mm
- leaf construction of 2 steel skins 0.75 mm
- rockwool infill 140 kg/m<sup>3</sup> with plasterboard, leaf weight = 47 kg/m<sup>2</sup>
- powder coating, RAL palette

**DOOR SIZES**

	according to certificate AC158-UWB-W1485	according to CE- CSWU-2310-CPR-W1116
	internal door	external door
S width	1153 mm ÷ 2230 mm	1114 mm ÷ 2344 mm
H height	1768 mm ÷ 2345 mm	1760 mm ÷ 2345 mm

**CERTIFICATES**

National Certificate of Constasy of Performance, Certbud  
 Process Verbal, Efectis France  
 Classification report, Efectis Nederland  
 Certificate of Constasy of Performance, Certbud; CE marking- external doors

**STANDARD EQUIPMENT**

- 2 pcs of stainless steel 3D hinges
- 2 pcs of safety pins (in case of 3 hinges - 1 pc of safety pin)
- DIN eurocylinder and 3 standard keys
- set of stainless steel U-form handles on long shields
- perimeter rubber gasket, fire resistant intumescent gasket in door leaf and frame
- reinforcement for door closer
- flush bolt in astragal of passive leaf
- alternative equipment and other door features on request


**OPTIONAL DOOR CONSTRUCTION**

- glazed with round (internal door) or rectangular glazing, single or double glass

**TECHNICAL PARAMETERS**

Mechanical resistance	class 3 according to standard EN1192 optional class 4 according to standard EN1192
Mechanical durability	class 5 according to standard EN16034
Thermal insulation	not defined
Acoustic insulation	Rw (C,Ctr) = 42 (-1;-4) dB full door, glazed door untested
Corrosion class	C3 (optional C5)

**DRAWINGS**

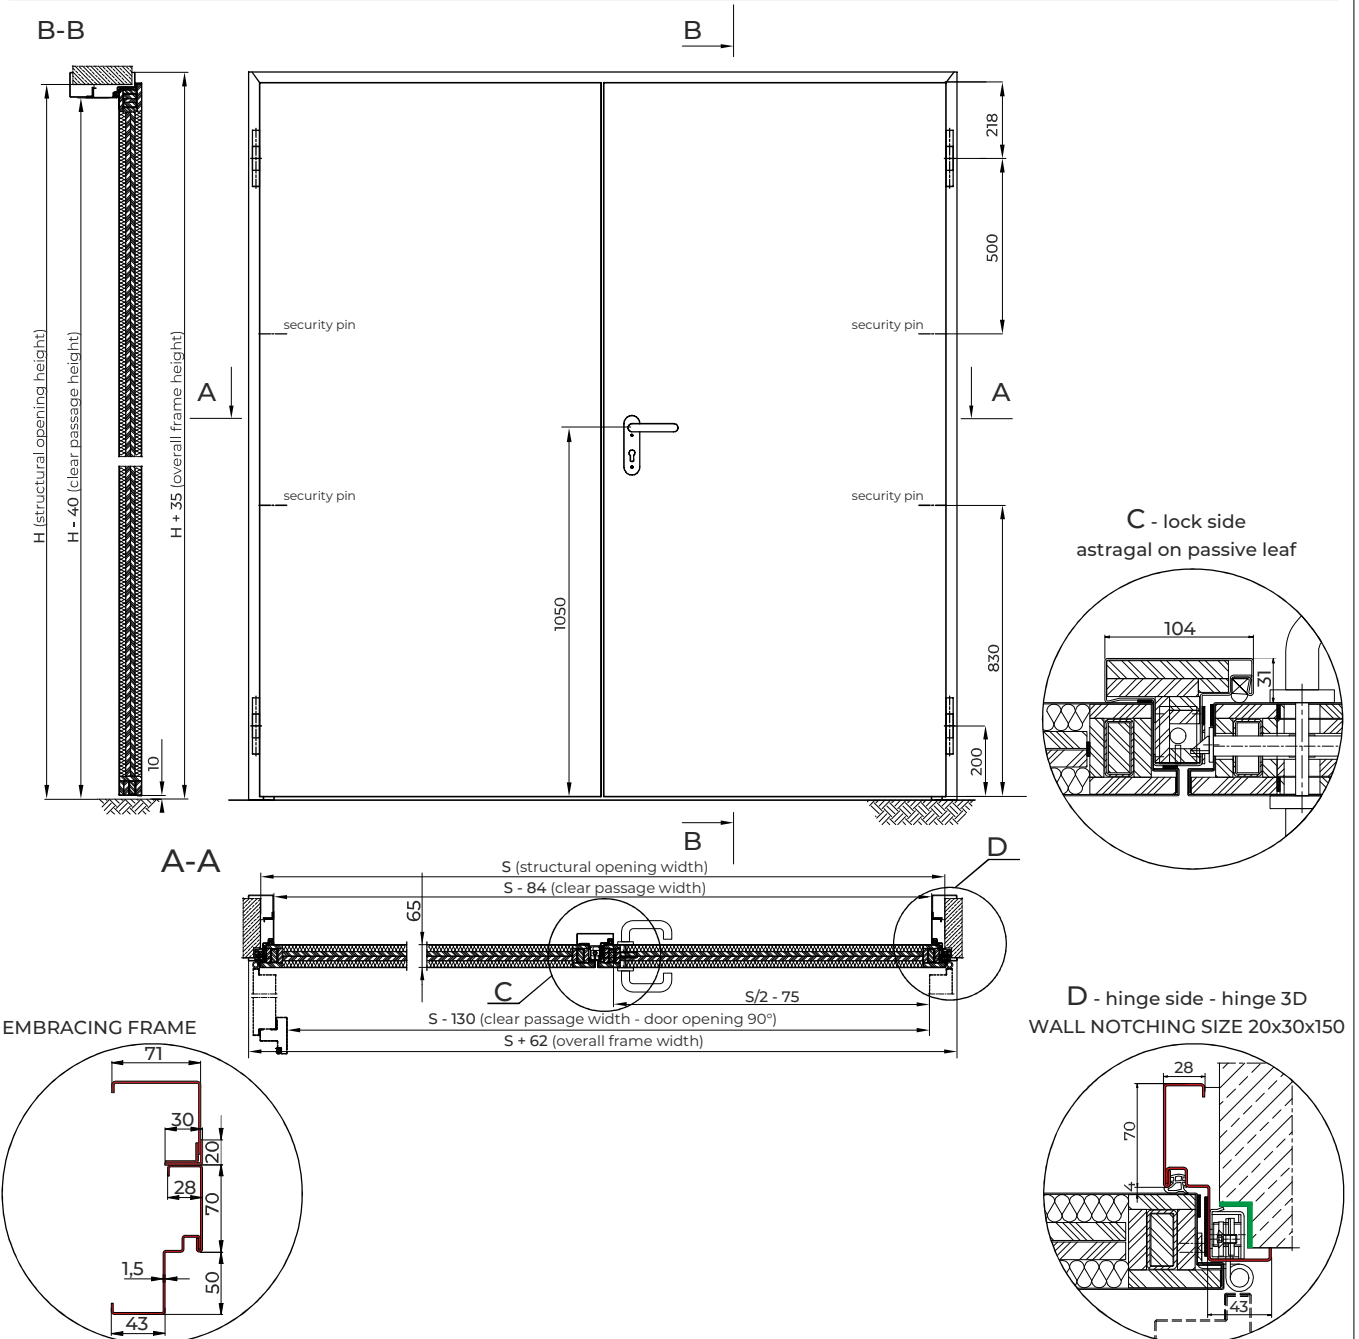

**DOOR SPECIFICATION**

- custom manufacturing
- leaf with thick rebate 18 x 18 mm
- steel zinc frame
- leaf thickness 65 mm
- leaf construction of 2 steel skins 0.75 mm
- rockwool infill 140 kg/m<sup>3</sup> with plasterboard, leaf weight = 47 kg/m<sup>2</sup>
- powder coating, RAL palette

**DOOR SIZES**

	according to certificate AC158-UWB-W1485	according to CE- CSWU-2310-CPR-W1116
	internal door	external door
S width	683 mm ÷ 1200 mm	643 mm ÷ 1200 mm
H height	1813 mm ÷ 2390 mm	1805 mm ÷ 2390 mm

**CERTIFICATES**

National Certificate of Constancy of Performance, Certbud  
 Process Verbal, Efectis France  
 Classification report, Efectis Nederland  
 Certificate of Constancy of Performance, Certbud; CE marking- external doors

**STANDARD EQUIPMENT**

- 2 pcs of stainless steel 3D hinges
- 2 pcs of safety pins (in case of 3 hinges - 1 pc of safety pin)
- DIN eurocylinder and 3 standard keys
- set of stainless steel U-form handles on long shields
- perimeter rubber gasket, fire resistant intumescent gasket in door leaf and frame
- reinforcement for door closer
- alternative equipment and other door features on request


**OPTIONAL DOOR CONSTRUCTION**

- glazed with round (internal door) or rectangular glazing, single or double glass

**TECHNICAL PARAMETERS**

Mechanical resistance class 3 according to standard EN1192  
 optional class 4 according to standard EN1192  
 Mechanical durability class 5 according to standard EN16034  
 Thermal insulation 1,8 Ud [W/m<sup>2</sup>K] full door  
 Acoustic insulation Rw (C,Ctr) = 42 (-1;-4) dB full door; glazed door untested  
 Corrosion class C3 (optional C5)

**DRAWINGS**

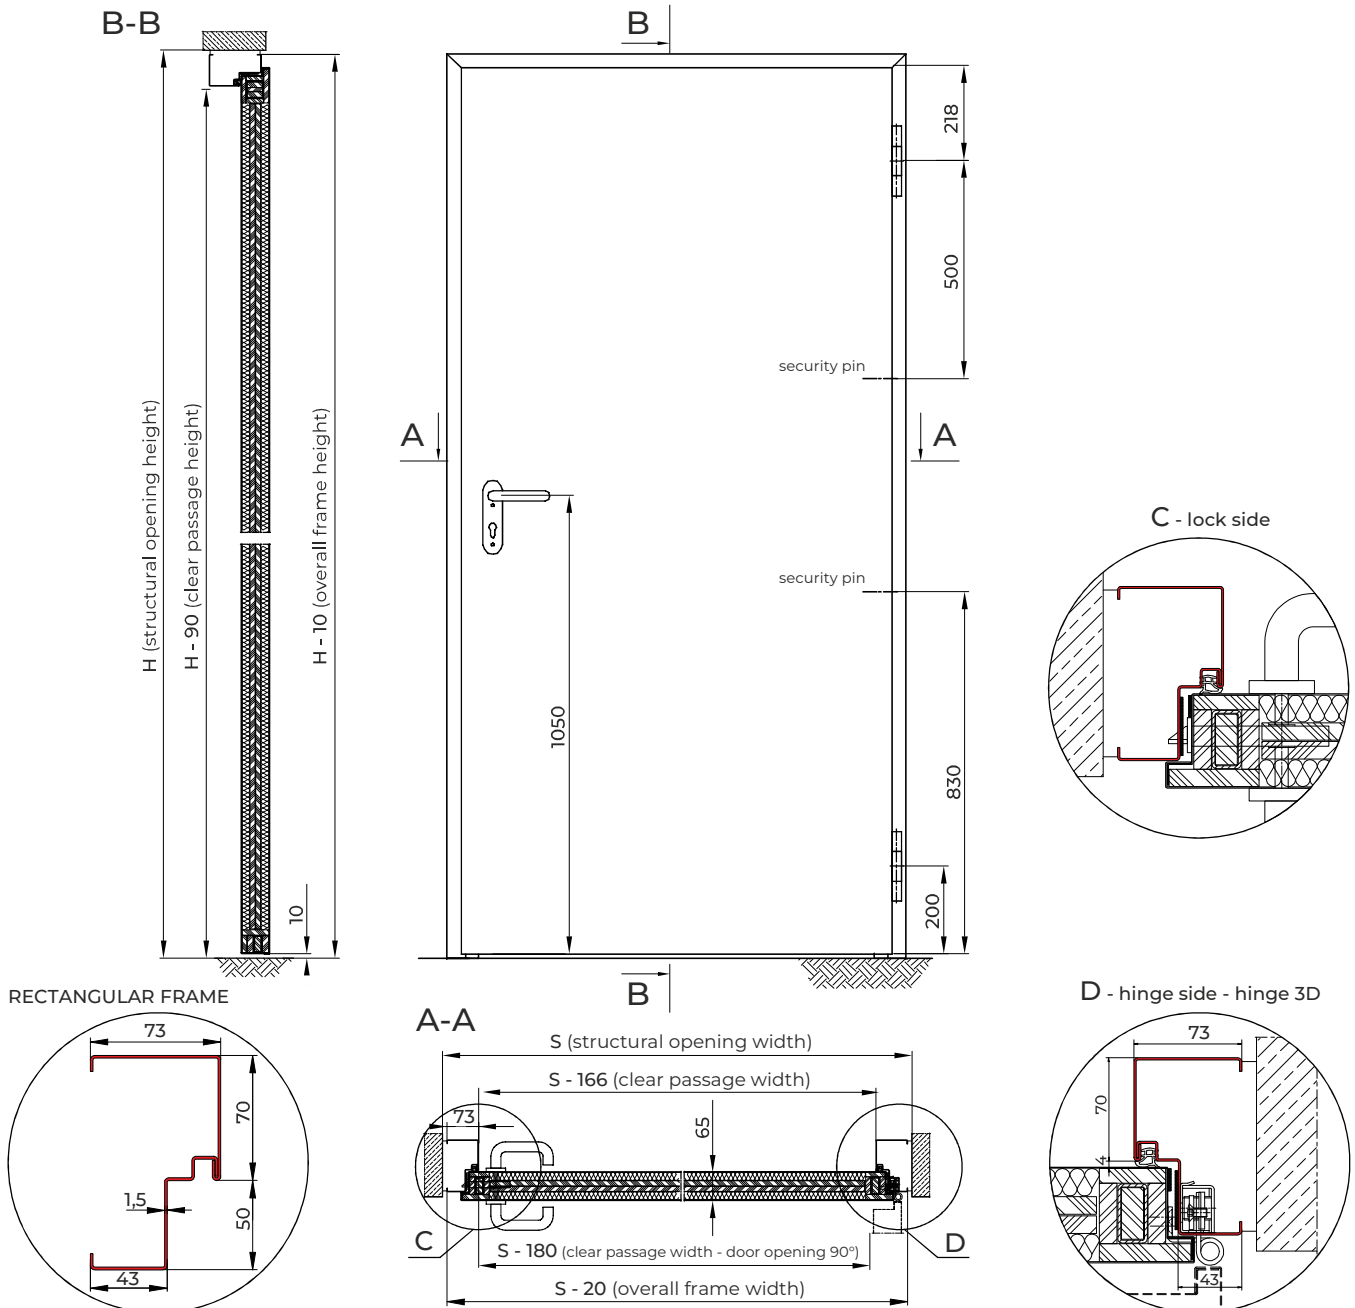

**DOOR SPECIFICATION**

- custom manufacturing
- leaf with thick rebate 18 x 18 mm
- steel zinc frame
- leaf thickness 65 mm
- leaf construction of 2 steel skins 0.75 mm
- rockwool infill 140 kg/m<sup>3</sup> with plasterboard, leaf weight = 47 kg/m<sup>2</sup>
- powder coating, RAL palette

**DOOR SIZES**

	according to certificate AC158-UWB-W1485	according to CE- CSWU-2310-CPR-W1116
	internal door	external door
S width	1243 mm ÷ 2320 mm	1204 mm ÷ 2434 mm
H height	1813 mm ÷ 2390 mm	1805 mm ÷ 2390 mm

**CERTIFICATES**

National Certificate of Constasy of Performance, Certbud  
 Process Verbal, Efectis France  
 Classification report, Efectis Nederland  
 Certificate of Constasy of Performance, Certbud; CE marking- external doors

**STANDARD EQUIPMENT**

- 2 pcs of stainless steel 3D hinges
- 2 pcs of safety pins (in case of 3 hinges - 1 pc of safety pin)
- DIN eurocylinder and 3 standard keys
- set of stainless steel U-form handles on long shields
- perimeter rubber gasket, fire resistant intumescent gasket in door leaf and frame
- reinforcement for door closer
- flush bolt in astragal of passive leaf
- alternative equipment and other door features on request

**OPTIONAL DOOR CONSTRUCTION**

- glazed with round (internal door) or rectangular glazing, single or double glass

**TECHNICAL PARAMETERS**

Mechanical resistance	class 3 according to standard EN1192 optional class 4 according to standard EN1192
Mechanical durability	class 5 according to standard EN16034
Thermal insulation	1,8 Ud [W/m <sup>2</sup> K] full door
Acoustic insulation	Rw (C,Ctr) = 42 (-1;-4) dB full door; glazed door untested
Corrosion class	C3 (optional C5)

**DRAWINGS**

