

DOOR SPECIFICATION

- custom manufacturing
- leaf with thick rebate 18 x 18 mm
- rigid aluminum frame with thermal break
- leaf thickness 65 mm
- leaf construction of 2 steel skins 0.75 mm
- rockwool infill 140 kg/m³, leaf weight = 27 kg/m²
- powder coating, RAL palette

DOOR SIZES

	according to National Technical Assessment ITB-KOT-2017/0156 rev. 3
	internal/external door
S width	597 mm ÷ 1130 mm
H height	1582 mm ÷ 2265 mm

CERTIFICATES

National Technical Assessment (KOT), ITB
Certificate of Constancy of Performance, Certbud; CE marking- external doors

STANDARD EQUIPMENT

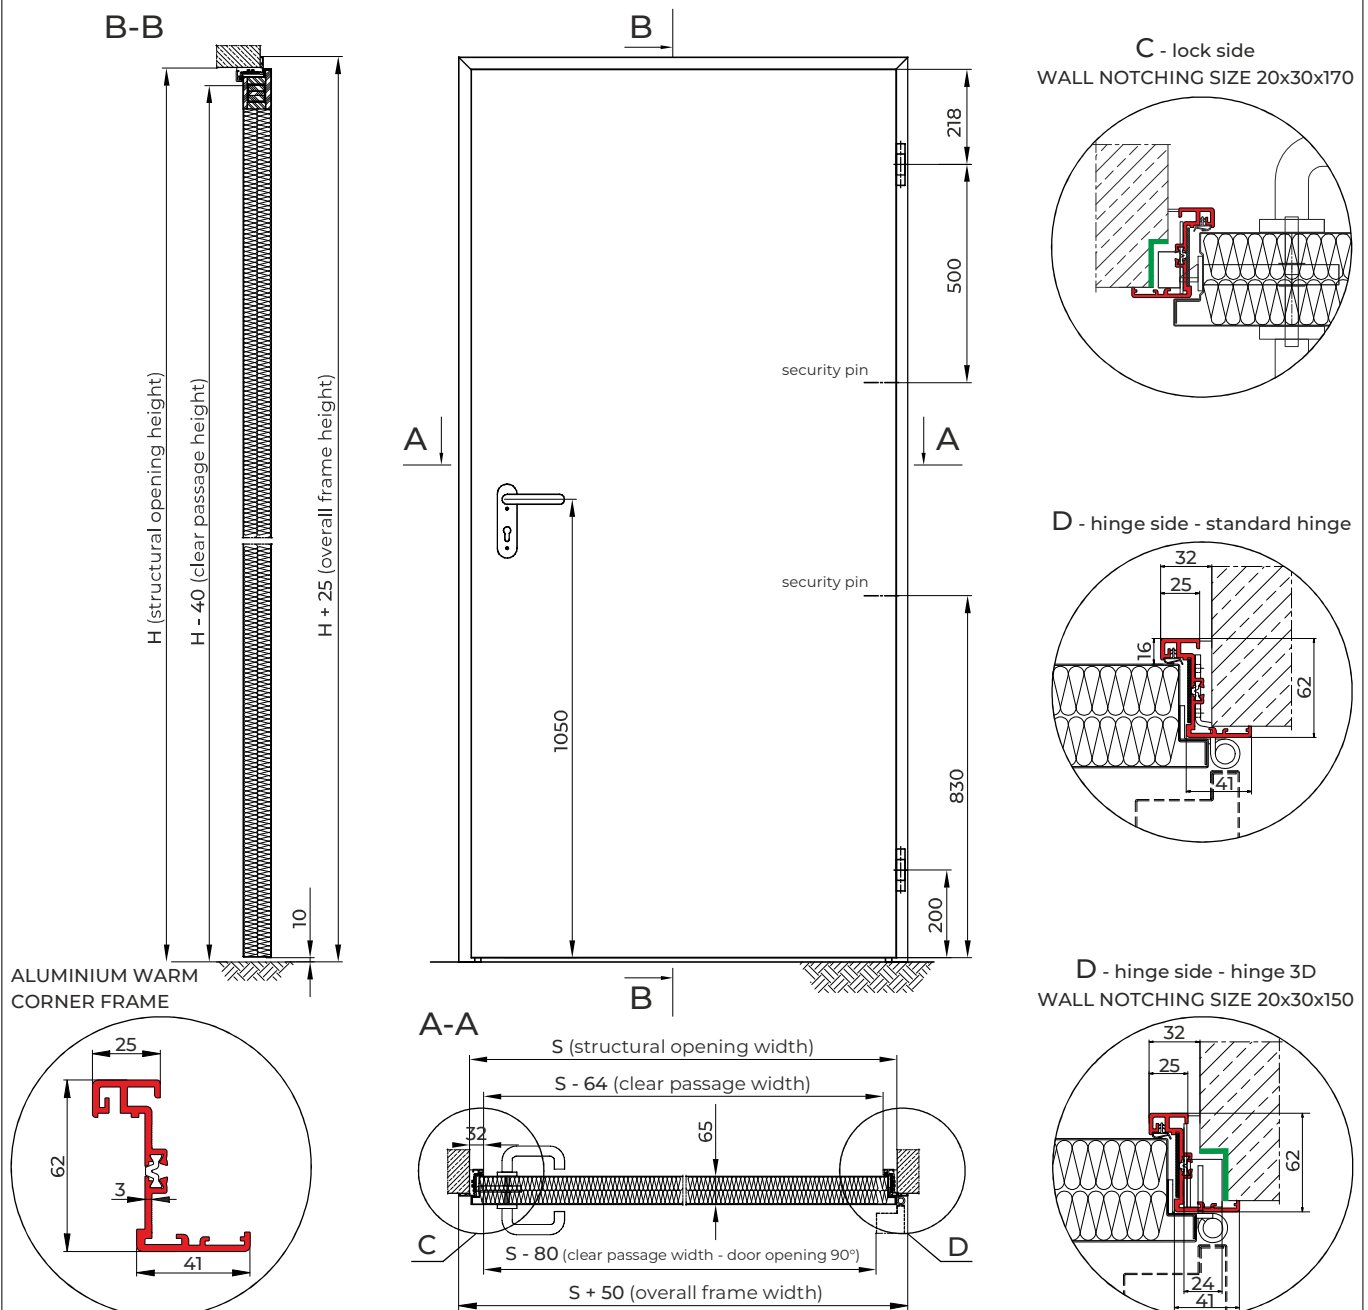
- 2 pcs of non-adjustable stainless steel hinges (optional: 2 pcs of stainless steel 3D hinges)
- 2 pcs of safety pins (in case of 3 hinges - 1 pc of safety pin)
- DIN eurocylinder and 3 standard keys
- set of stainless steel U-form handles on long shields
- perimeter rubber gasket, fire resistant intumescent gasket in door frame, smokeproof gasket for class Sa, S₂₀₀
- reinforcement for door closer
- alternative equipment and other door features on request

OPTIONAL DOOR CONSTRUCTION

- glazed with rectangular or round glazing, single or double glass
- fitted with fire resistant ventilation grill(s)

TECHNICAL PARAMETERS

Mechanical resistance	class 3 according to standard EN1192 optional class 4 according to standard EN1192
Mechanical durability	class 5 according to standard EN16034
Thermal insulation	not defined
Acoustic insulation	untested
Corrosion class	C3 (optional C5)

DRAWINGS

DOOR SPECIFICATION

- custom manufacturing
- leaf with thick rebate 18 x 18 mm
- steel zinc frame
- leaf thickness 65 mm
- leaf construction of 2 steel skins 0.75 mm
- rockwool infill 140 kg/m³ with plasterboard, leaf weight = 47 kg/m²
- powder coating, RAL palette

DOOR SIZES

	according to certificate AC158-UWB-W1485	according to CE- CSWU-2310-CPR-W1116
	internal door	external door
S width	593 mm ÷ 1110 mm	563 mm ÷ 1120 mm
H height	1768 mm ÷ 2345 mm	1760 mm ÷ 2345 mm

CERTIFICATES

National Certificate of Constancy of Performance, Certbud
Process Verbal, Efectis France
Classification report, Efectis Nederland
Certificate of Constancy of Performance, Certbud; CE marking- external doors

STANDARD EQUIPMENT

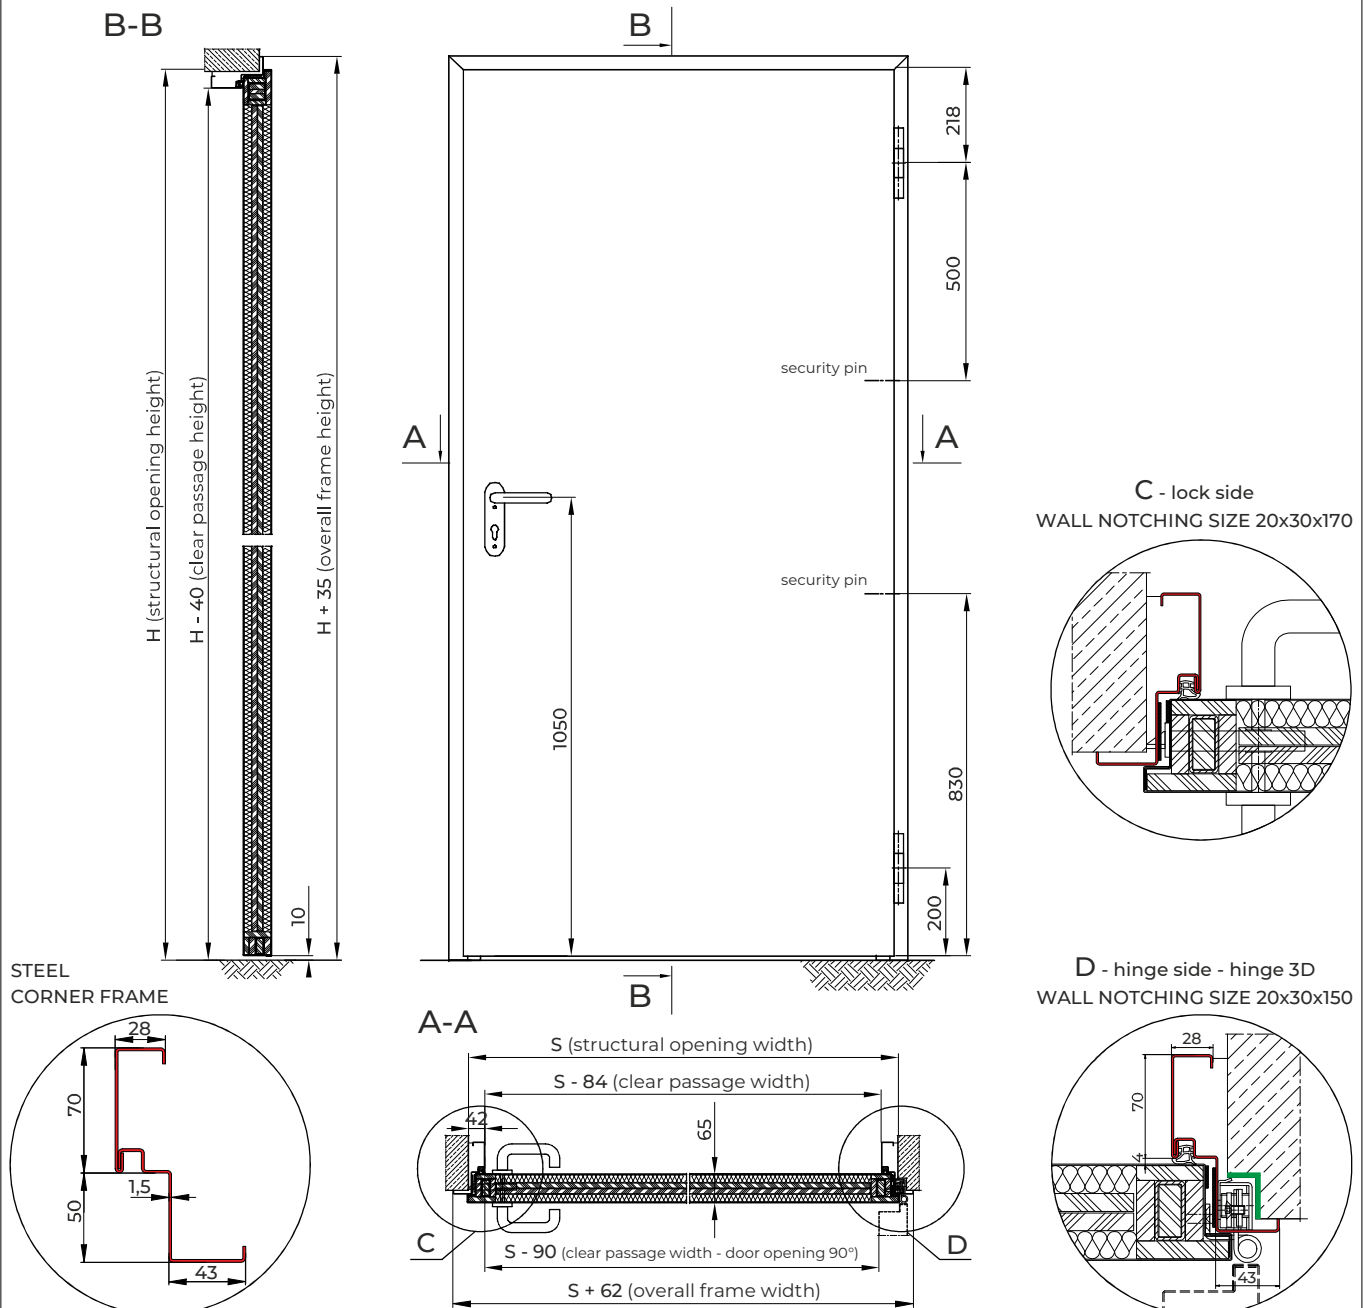
- 2 pcs of stainless steel 3D hinges
- 2 pcs of safety pins
(in case of 3 hinges - 1 pc of safety pin)
- DIN eurocylinder and 3 standard keys
- set of stainless steel U-form handles on long shields
- perimeter rubber gasket, fire resistant intumescent gasket
in door leaf and frame
- reinforcement for door closer
- alternative equipment and other door features on request

OPTIONAL DOOR CONSTRUCTION

- glazed with round (internal door) or rectangular glazing,
single glass

TECHNICAL PARAMETERS

Mechanical resistance	class 3 according to standard EN1192 optional class 4 according to standard EN1192
Mechanical durability	class 5 according to standard EN1192
Thermal insulation	1,6 Ud [W/m ² K] full door
Acoustic insulation	Rw (C, C _{tr}) = 42 (-1; 4) dB full door; glazed door untested
Corrosion class	C3 (optional C5)

DRAWINGS

DOOR SPECIFICATION

- custom manufacturing
- leaf with thick rebate 18 x 18 mm
- steel zinc frame
- leaf thickness 65 mm
- leaf construction of 2 steel skins 0.75 mm
- rockwool infill 140 kg/m³ with plasterboard, leaf weight = 47 kg/m²
- powder coating, RAL palette

DOOR SIZES

	according to certificate AC158-UWB-W1485	according to CE- CSWU-2310-CPR-W1116
	internal door	external door
S width	1153 mm ÷ 2230 mm	1114 mm ÷ 2344 mm
H height	1768 mm ÷ 2345 mm	1760 mm ÷ 2345 mm

CERTIFICATES

National Certificate of Constancy of Performance, Certbud
Process Verbal, Efectis France
Classification report, Efectis Nederland
Certificate of Constancy of Performance, Certbud; CE marking- external doors

STANDARD EQUIPMENT

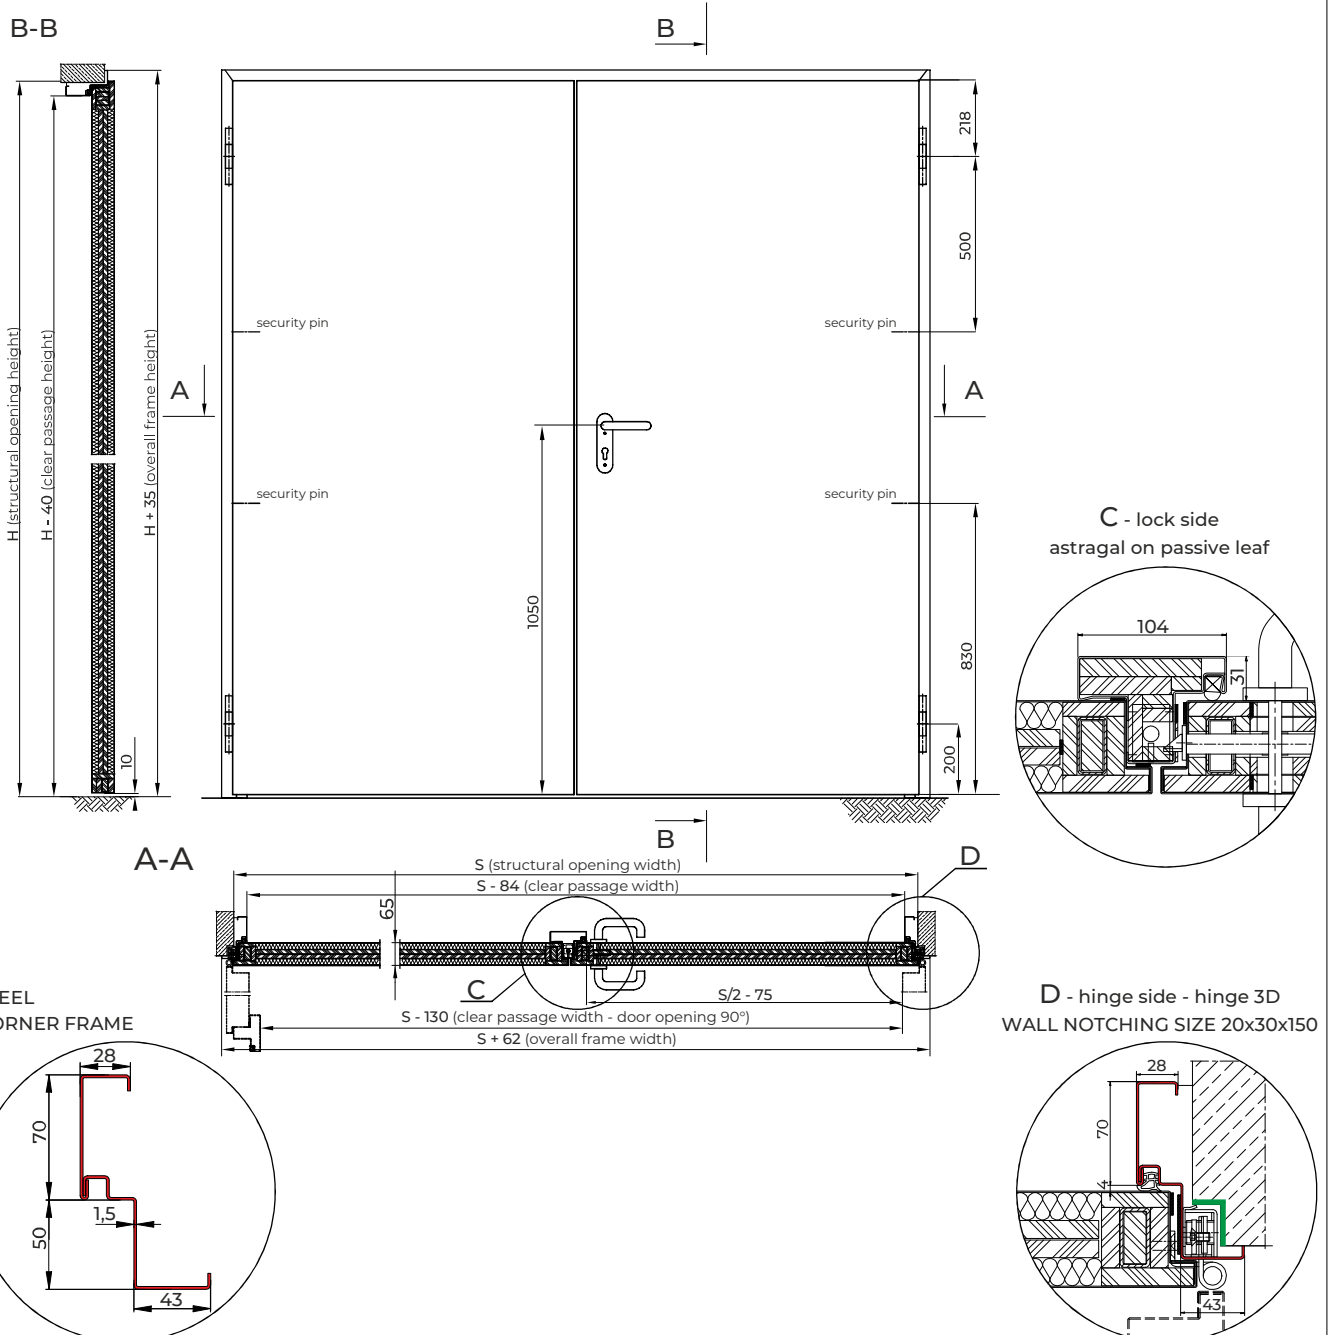
- 2 pcs of stainless steel 3D hinges
- 2 pcs of safety pins
(in case of 3 hinges - 1 pc of safety pin)
- DIN eurocylinder and 3 standard keys
- set of stainless steel U-form handles on long shields
- perimeter rubber gasket, fire resistant intumescent gasket in door leaf and frame
- reinforcement for door closer
- flush bolt in astragal of passive leaf
- alternative equipment and other door features on request

OPTIONAL DOOR CONSTRUCTION

- glazed with round (internal door) or rectangular glazing, single glass

TECHNICAL PARAMETERS

Mechanical resistance	class 3 according to standard EN1192 optional class 4 according to standard EN1192
Mechanical durability	class 5 according to standard EN16034
Thermal insulation	1,6 Ud [W/m ² K] full door
Acoustic insulation	Rw (C _{tr}) = 42 (-1;-4) dB full door; glazed door untested
Corrosion class	C3 (optional C5)

DRAWINGS

DOOR SPECIFICATION

- custom manufacturing
- leaf with thick rebate 18 x 18 mm
- rigid aluminum frame with thermal break
- leaf thickness 65 mm
- leaf construction of 2 steel skins 0.75 mm
- rockwool infill 140 kg/m³, leaf weight = 27 kg/m²
- powder coating, RAL palette

DOOR SIZES

	according to National Technical Assessment ITB-KOT-2017/0156 rev. 3
	internal/external door
S width	597 mm ÷ 1130 mm
H height	1582 mm ÷ 2265 mm

CERTIFICATES

National Technical Assessment (KOT), ITB
Certificate of Constancy of Performance, Certbud; CE marking- external doors

STANDARD EQUIPMENT

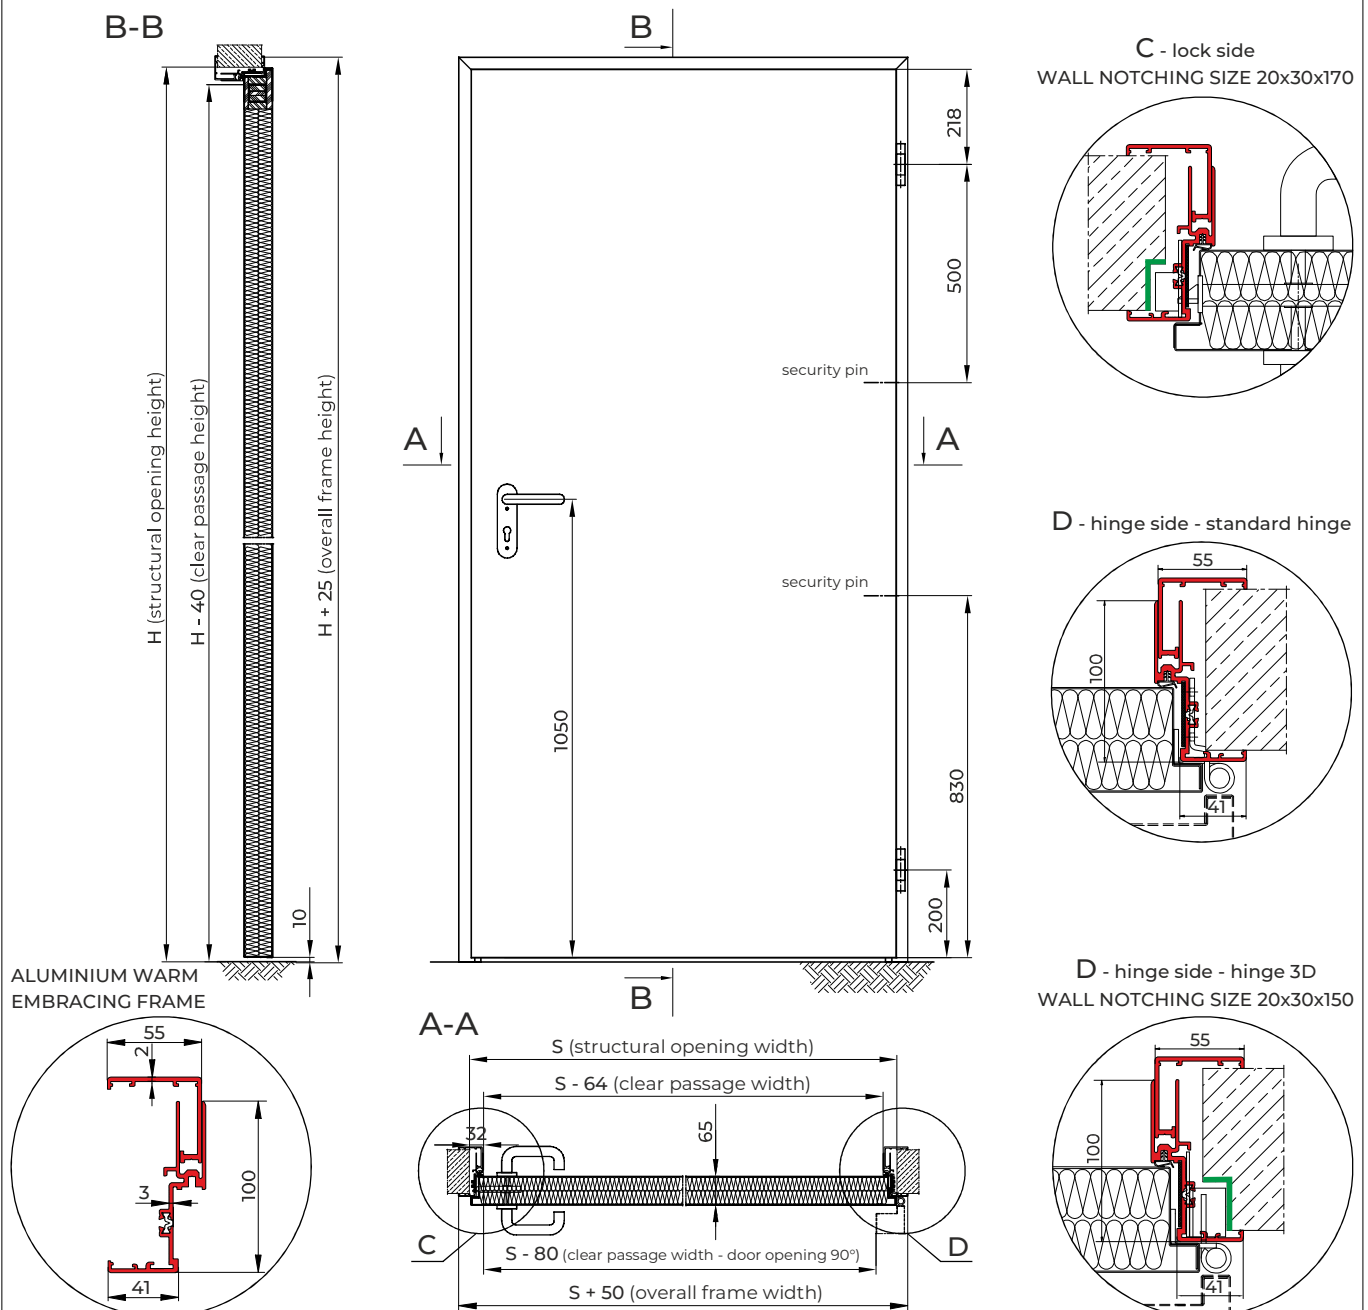
- 2 pcs of non-adjustable stainless steel hinges (optional: 2 pcs of stainless steel 3D hinges)
- 2 pcs of safety pins (in case of 3 hinges - 1 pc of safety pin)
- DIN eurocylinder and 3 standard keys
- set of stainless steel U-form handles on long shields
- perimeter rubber gasket, fire resistant intumescent gasket in door frame, smokeproof gasket for class Sa, S₂₀₀
- reinforcement for door closer
- alternative equipment and other door features on request

OPTIONAL DOOR CONSTRUCTION

- glazed with rectangular or round glazing, single or double glass
- fitted with fire resistant ventilation grill(s)

TECHNICAL PARAMETERS

Mechanical resistance	class 3 according to standard EN1192
Mechanical durability	optional class 4 according to standard EN1192
Thermal insulation	class 5 according to standard EN16034
Acoustic insulation	not defined
Corrosion class	untested
	C3 (optional C5)

DRAWINGS

DOOR SPECIFICATION

- custom manufacturing
- leaf with thick rebate 18 x 18 mm
- steel zinc frame
- leaf thickness 65 mm
- leaf construction of 2 steel skins 0.75 mm
- rockwool infill 140 kg/m³ with plasterboard, leaf weight = 47 kg/m²
- powder coating, RAL palette

DOOR SIZES

	according to certificate AC158-UWB-W1485	according to CE- CSWU-2310-CPR-W1116
	internal door	external door
S width	593 mm ÷ 1110 mm	563 mm ÷ 1120 mm
H height	1768 mm ÷ 2345 mm	1760 mm ÷ 2345 mm

CERTIFICATES

National Certificate of Constancy of Performance, Certbud
 Process Verbal, Efectis France
 Classification report, Efectis Nederland
 Certificate of Constancy of Performance, Certbud; CE marking- external doors

STANDARD EQUIPMENT

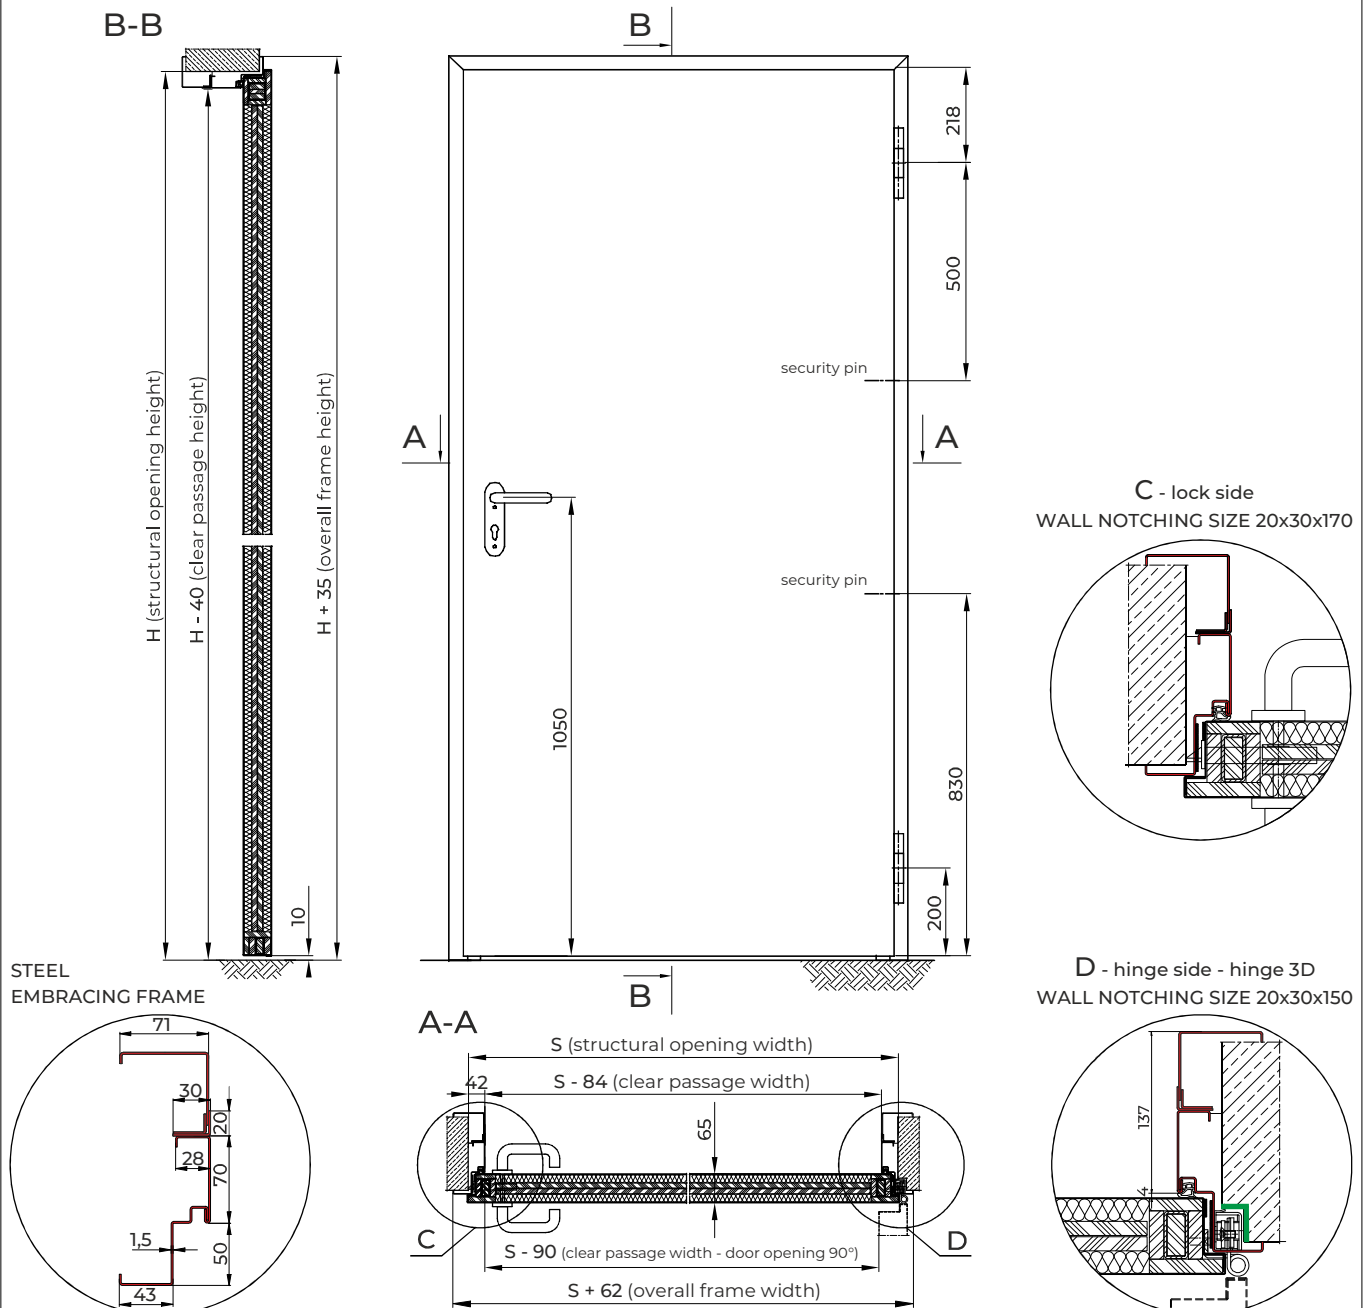
- 2 pcs of stainless steel 3D hinges
- 2 pcs of safety pins
(in case of 3 hinges - 1 pc of safety pin)
- DIN eurocylinder and 3 standard keys
- set of stainless steel U-form handles on long shields
- perimeter rubber gasket, fire resistant intumescent gasket
in door leaf and frame
- reinforcement for door closer
- alternative equipment and other door features on request

OPTIONAL DOOR CONSTRUCTION

- glazed with round (internal door) or rectangular glazing,
single glass

TECHNICAL PARAMETERS

Mechanical resistance	class 3 according to standard EN1192 optional class 4 according to standard EN1192
Mechanical durability	class 5 according to standard EN16034
Thermal insulation	not defined
Acoustic insulation	Rw (C,Ctr) = 42 (-1;-4) dB full door; glazed door untested
Corrosion class	C3 (optional C5)

DRAWINGS

DOOR SPECIFICATION

- custom manufacturing
- leaf with thick rebate 18 x 18 mm
- steel zinc frame
- leaf thickness 65 mm
- leaf construction of 2 steel skins 0.75 mm
- rockwool infill 140 kg/m³ with plasterboard, leaf weight = 47 kg/m²
- powder coating, RAL palette

DOOR SIZES

	according to certificate AC158-UWB-W1485	according to CE- CSWU-2310-CPR-W1116
	internal door	external door
S width	1153 mm ÷ 2230 mm	1114 mm ÷ 2344 mm
H height	1768 mm ÷ 2345 mm	1760 mm ÷ 2345 mm

CERTIFICATES

National Certificate of Constancy of Performance, Certbud
 Process Verbal, Efectis France
 Classification report, Efectis Nederland
 Certificate of Constancy of Performance, Certbud; CE marking- external doors

STANDARD EQUIPMENT

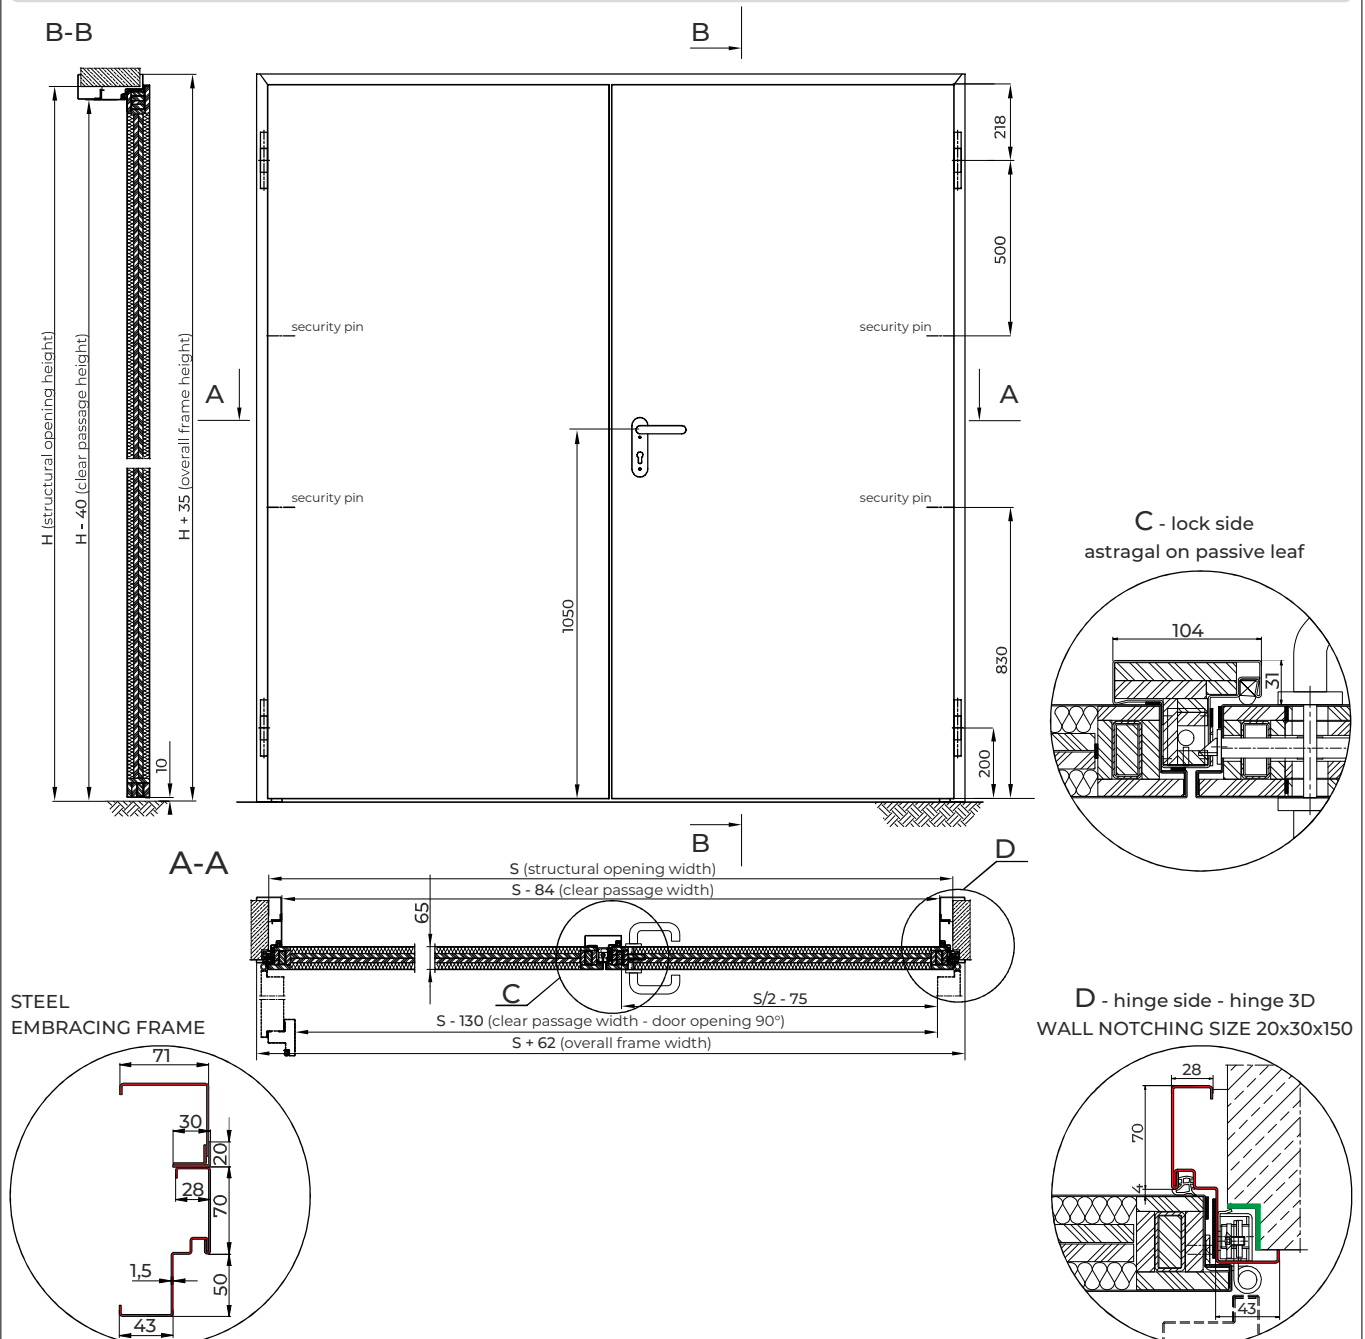
- 2 pcs of stainless steel 3D hinges
- 2 pcs of safety pins
(in case of 3 hinges - 1 pc of safety pin)
- DIN eurocylinder and 3 standard keys
- set of stainless steel U-form handles on long shields
- perimeter rubber gasket, fire resistant intumescent gasket in door leaf and frame
- reinforcement for door closer
- flush bolt in astragal of passive leaf
- alternative equipment and other door features on request

OPTIONAL DOOR CONSTRUCTION

- glazed with round (internal door) or rectangular glazing, single glass

TECHNICAL PARAMETERS

Mechanical resistance	class 3 according to standard EN1192 optional class 4 according to standard EN1192
Mechanical durability	class 5 according to standard EN16034
Thermal insulation	not defined
Acoustic insulation	Rw (C,Ctr) = 42 (-1;-4) dB full door; glazed door untested
Corrosion class	C3 (optional C5)

DRAWINGS

DOOR SPECIFICATION

- custom manufacturing
- leaf with thick rebate 18 x 18 mm
- rigid aluminum frame with thermal break
- leaf thickness 65 mm
- leaf construction of 2 steel skins 0.75 mm
- rockwool infill 140 kg/m³, leaf weight = 27 kg/m²
- powder coating, RAL palette

DOOR SIZES

	according to National Technical Assessment ITB-KOT-2017/0156 rev. 3
	internal/external door
S width	667 mm ÷ 1200 mm
H height	1617 mm ÷ 2300 mm

CERTIFICATES

National Technical Assessment (KOT), ITB
Certificate of Constancy of Performance, Certbud; CE marking- external doors

STANDARD EQUIPMENT

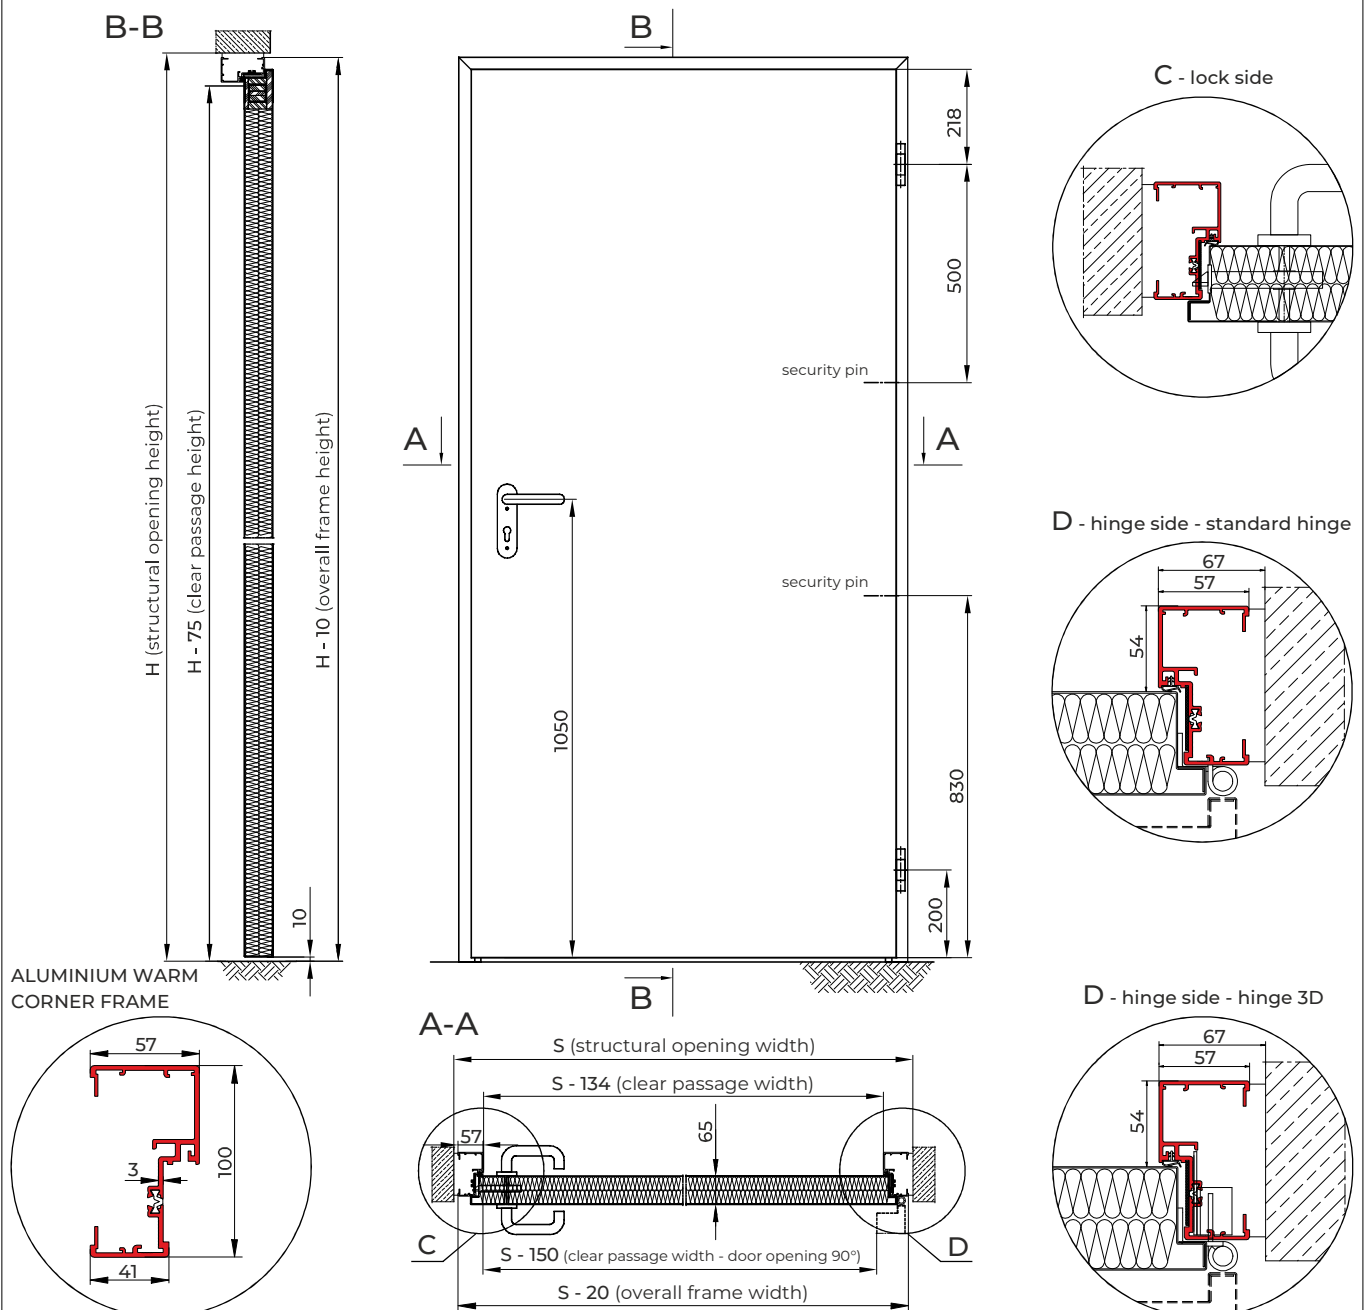
- 2 pcs of non-adjustable stainless steel hinges (optional: 2 pcs of stainless steel 3D hinges)
- 2 pcs of safety pins (in case of 3 hinges - 1 pc of safety pin)
- DIN eurocylinder and 3 standard keys
- set of stainless steel U-form handles on long shields
- perimeter rubber gasket, fire resistant intumescent gasket in door frame, smokeproof gasket for class Sa, S₂₀₀
- reinforcement for door closer
- alternative equipment and other door features on request

OPTIONAL DOOR CONSTRUCTION

- glazed with rectangular or round glazing, single or double glass
- fitted with fire resistant ventilation grill(s)

TECHNICAL PARAMETERS

Mechanical resistance	class 3 according to standard EN1192
Mechanical durability	optional class 4 according to standard EN1192
Thermal insulation	class 5 according to standard EN16034
Acoustic insulation	not defined
Corrosion class	untested
	C3 (optional C5)

DRAWINGS

DOOR SPECIFICATION

- custom manufacturing
- leaf with thick rebate 18 x 18 mm
- steel zinc frame
- leaf thickness 65 mm
- leaf construction of 2 steel skins 0.75 mm
- rockwool infill 140 kg/m³ with plasterboard, leaf weight = 47 kg/m²
- powder coating, RAL palette

DOOR SIZES

	according to certificate AC158-UWB-W1485	according to CE- CSWU-2310-CPR-W1116
	internal door	external door
S width	683 mm ÷ 1200 mm	643 mm ÷ 1200 mm
H height	1813 mm ÷ 2390 mm	1805 mm ÷ 2390 mm

CERTIFICATES

National Certificate of Constancy of Performance, Certbud
 Process Verbal, Effectis France
 Classification report, Effectis Nederland
 Certificate of Constancy of Performance, Certbud; CE marking- external doors

STANDARD EQUIPMENT

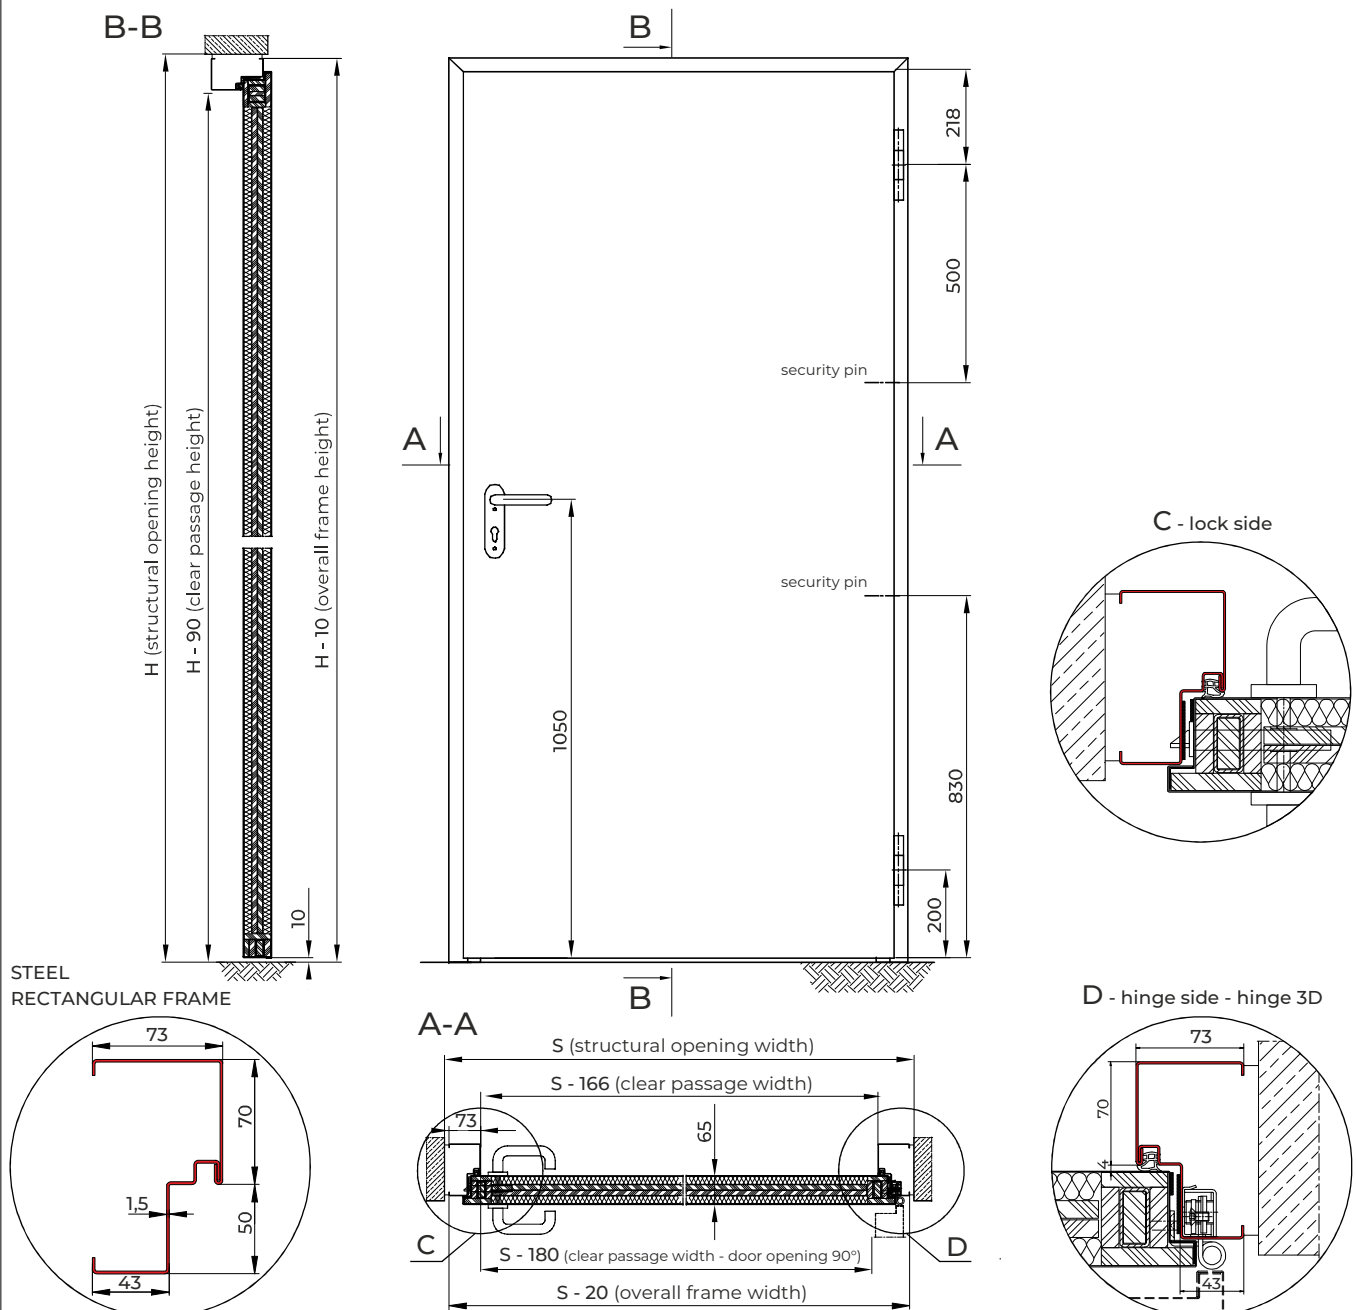
- 2 pcs of stainless steel 3D hinges
- 2 pcs of safety pins
(in case of 3 hinges - 1 pc of safety pin)
- DIN eurocylinder and 3 standard keys
- set of stainless steel U-form handles on long shields
- perimeter rubber gasket, fire resistant intumescent gasket
in door leaf and frame
- reinforcement for door closer
- alternative equipment and other door features on request

OPTIONAL DOOR CONSTRUCTION

- glazed with round (internal door) or rectangular glazing,
single glass

TECHNICAL PARAMETERS

Mechanical resistance	class 3 according to standard EN1192 optional class 4 according to standard EN1192
Mechanical durability	class 5 according to standard EN16034
Thermal insulation	1,8 Ud [W/m ² K] full door
Acoustic insulation	Rw (C,Ctr) = 42 (-1;-4) dB full door; glazed door untested
Corrosion class	C3 (optional C5)

DRAWINGS

DOOR SPECIFICATION

- custom manufacturing
- leaf with thick rebate 18 x 18 mm
- steel zinc frame
- leaf thickness 65 mm
- leaf construction of 2 steel skins 0.75 mm
- rockwool infill 140 kg/m³ with plasterboard, leaf weight = 47 kg/m²
- powder coating, RAL palette

DOOR SIZES

	according to certificate AC158-UWB-W1485	according to CE- CSWU-2310-CPR-W1116
	internal door	external door
S width	1243 mm ÷ 2320 mm	1204 mm ÷ 2434 mm
H height	1813 mm ÷ 2390 mm	1805 mm ÷ 2390 mm

CERTIFICATES

National Certificate of Constancy of Performance, Certbud
Process Verbal, Efectis France
Classification report, Efectis Nederland
Certificate of Constancy of Performance, Certbud; CE marking- external doors

STANDARD EQUIPMENT

- 2 pcs of stainless steel 3D hinges
- 2 pcs of safety pins
(in case of 3 hinges - 1 pc of safety pin)
- DIN eurocylinder and 3 standard keys
- set of stainless steel U-form handles on long shields
- perimeter rubber gasket, fire resistant intumescent gasket in door leaf and frame
- reinforcement for door closer
- flush bolt in astragal of passive leaf
- alternative equipment and other door features on request

OPTIONAL DOOR CONSTRUCTION

- glazed with round (internal door) or rectangular glazing, single glass

TECHNICAL PARAMETERS

Mechanical resistance	class 3 according to standard EN1192 optional class 4 according to standard EN1192
Mechanical durability	class 5 according to standard EN16034
Thermal insulation	1,8 Ud [W/m ² K] full door
Acoustic insulation	Rw (C _{Tr}) = 42 (-1;-4) dB full door; glazed door untested
Corrosion class	C3 (optional C5)

DRAWINGS